



Faculty of Electrical Engineering

**Torque Density Improvement of Spoke Type BLDC Motor Using
Hollow Rotor Topology**

Farina Binti Sulaiman

Master of Science in Electrical Engineering

2016

**TORQUE DENSITY IMPROVEMENT OF SPOKE TYPE BLDC MOTOR USING
HOLLOW ROTOR TOPOLOGY**

FARINA BINTI SULAIMAN

**A thesis submitted
in fulfillment of the requirements for the degree of Master of Science
in Electrical Engineering**

Faculty of Electrical Engineering

UNIVERSITI TEKNIKAL MALAYSIA MELAKA

2016

DECLARATION

I declare that this thesis entitled “Torque Density Improvement of Spoke Type BLDC Motor Using Hollow Rotor Topology” is the result of my own research except as cited in the references. The thesis has not been accepted for any degree and is not concurrently submitted in candidature of any other degree.

Signature : 


Name : Farina Binti Sulaiman

Date : 31/10/2016

APPROVAL

I hereby declare that I have read this thesis and in my opinion this thesis is sufficient in terms of scope and quality for the award of Master of Science in Electrical Engineering.

Signature :
Supervisor Name :
Date :


Dr. Raja Nor Firdaus Kashfi
Senior Lecturer
Faculty Of Electrical Engineering
Universiti Teknikal Malaysia Melaka
Hang Tuah Jaya, 76100
Durian Tunggal, Melaka.

31/10/2016

DEDICATION

To my husband and cutest daughter,

Mohd Azam Bin Tumijan and Khaulah al Khansa Binti Mohd Azam

My beloved parents,

Sulaiman Bin Jamaldeen, Gafurah Binti Shadi Khan and Manirah Binti Saleh

Lastly, my brothers and sister,

Mohammed Feroz Bin Sulaiman, Mohammed Faizal Bin Sulaiman, Fazillah Binti Sulaiman, Mohammed Fared Bin Sulaiman

ABSTRACT

A spoke type motor has high torque because it uses reluctance torque and magnetic torque simultaneously. Rotor spoke type BLDC have a large amount of circling flux below the permanent magnet. This means that the motor cannot operate in optimum condition due to large unused flux. To overcome this problem, thickness of inner rotor radius, r_3 is increase in order to study effect of edge magnet. Hollow rotor is designed to maximize the usage of flux by contributing all the unused flux to circulate around coil. Finite Element Method (FEM) is used to analyze the characteristic and performance of spoke type BLDC machine which include radial flux density, tangential flux density, back emf, inductance, flux linkage and torque. Then, a new spoke type BLDC motor called as Hollow rotor is proposed to overcome the usage of flux in spoke type BLDC motor. For the methodology, some value for design of stator, coil and permanent magnet are selected based on the required specification. After that, electromagnetic characteristic of the selected conventional model is analyzed and parameter for the flux leakage reduction is carried out. In addition, performance analysis of the proposed hollow-rotor also been carried out. Hollow rotor spoke type BLDC motor is been fabricated and experimentally evaluated. The simulation results from the FEM are verified with the measurement result in term of back emf, static torque, torque vs speed, mechanical power, output power, dynamic torque and efficiency and has shown a good agreement. Torque density of hollow-rotor increase almost 50% compared to conventional spoke type BLDC motor. In conclusions, the research proposed a new improvement in spoke type BLDC motor that could provide higher torque density with reasonable motor size. Finally, this thesis provides guidelines, suggestions and proposes a better improved structure in designing BLDC motor.

ABSTRAK

Motor jenis spoke mempunyai tork yang tinggi kerana ia menggunakan tork keengganan dan tork magnet serentak. Rotor bercakap jenis BLDC mempunyai sejumlah besar mengelilingi fluks bawah magnet kekal. Ini bermakna bahawa motor tidak boleh beroperasi dalam keadaan optimum kerana fluks tidak digunakan besar. Untuk mengatasi masalah ini, ketebalan dalaman pemutar radius r_3 adalah peningkatan dalam usaha untuk mengkaji kesan daya magnet. rotor Hollow adalah reka bentuk untuk memaksimumkan penggunaan fluks dengan menyumbang semua fluks yang tidak digunakan untuk mengedarkan sekitar gegelung. Kaedah Unsur Terhingga (FEM) digunakan untuk menganalisis ciri jenis spoke mesin BLDC termasuk ketumpatan fluks jejarian, ketumpatan fluks tangen, belakang emf, kearuhan, hubungan fluks dan tork. Kemudian, sejenis spoke BLDC motor baru yang dipanggil sebagai pemutar Hollow dicadangkan untuk mengatasi penggunaan fluks dalam jenis spoke BLDC motor. Ini adalah kaedah yang, beberapa reka bentuk untuk stator, gegelung dan magnet kekal yang dipilih. Selepas itu, ciri-ciri elektromagnet model konvensional yang dipilih dianalisis dan parameter untuk mengurangkan kebocoran fluks dijalankan. Di samping itu, analisis prestasi dicadangkan berlubang-pemutar juga telah dijalankan. Hollow jenis rotor spoke BLDC motor telah direka dan uji kaji dinilai. Keputusan simulasi daripada analisis FEM yang disahkan dengan keputusan ukuran, dalam tempoh emf belakang, tork statik, tork vs kelajuan, kuasa mekanikal, kuasa output, tork dan kecekapan dan menunjukkan bahawa hasil simulasi mempunyai perjanjian yang baik. Ketumpatan tork peningkatan berlubang-rotor hampir dua kali ganda berbanding jenis spoke BLDC motor. Dalam kesimpulan, kajian ini mencadangkan peningkatan baru dalam jenis spoke BLDC motor yang boleh memberikan kepadatan tork lebih tinggi dengan saiz motor yang munasabah. Akhirnya, tesis ini menyediakan garis panduan, cadangan dan mencadangkan struktur yang lebih baik dalam mereka bentuk BLDC motor.

ACKNOWLEDGEMENT

All praise to supreme Almighty Allah s.w.t. the only creator, cherisher, sustainer and efficient assembler of the world and galaxies whose blessings and kindness have enabled author to accomplish this project successfully. I would like to take this opportunity to gratefully acknowledge the guidance, advice, support and encouragement from the supervisor, Dr. Raja Nor Firdaus Kashfi Bin Raja Othman who has gave me the golden opportunity to do this wonderful research and always believe that I could make it. Great appreciations are expressed to Dr. Kasrul Bin Abdul Karim and Dr. Fairul Bin Azhar for their valuable remarks, help, advice, and encouragement. I would like to express my sincere thanks of gratitude to Dr. Mohd Luqman Bin Mohd Jamil for the challenge, support and advice where it has indirectly help me to complete this research.

A very special thanks to my husband Mohd Azam and daughter Khaulah al Khansa who also is there during my difficult time. Thanks for always giving an encouragement words and makes me did not easily give up. Not forget to my family and in laws for been patient, supportive, and understanding. Not to forget, a deep appreciation to the Machine Design Group, Universiti Teknikal Malaysia Melaka (UTeM) for their kind assistance and help throughout the research period. Lastly, an appreciation also to the Faculty of Electrical Engineering, UTeM for providing the facilities and the component required for undertaking the project.

TABLE OF CONTENT

	PAGE
DECLARATION	
APPROVAL	
DEDICATION	
ABSTRACT	i
ABSTRAK	ii
ACKNOWLEDGEMENT	iii
TABLE OF CONTENT	iv
LIST OF TABLE	vi
LIST OF FIGURES	viii
LIST OF APPENDICES	xii
LIST OF ABBREVIATIONS	xiii
LIST OF PUBLICATION	xiv
CHAPTER	
1.0 INTRODUCTION	1
1.1 Background	1
1.2 Project Motivation	3
1.3 Problem Statement	4
1.4 Objective	6
1.5 Thesis Contribution	6
1.6 Scope of Work	6
1.7 Thesis Outline	7
2.0 LITERATURE REVIEW	9
2.1 State of Art of High Torque Density Motor	9
2.2 Related Research on Torque Density	12
2.3 Basic Principle of BLDC Motor	22
2.4 Basic Structure of Spoke BLDC Motor	27
2.5 Definition of Parameter	28
2.5.1 Back emf	28
2.5.2 Flux linkage	28
2.5.3 Air gap	29
2.5.4 Torque Characteristic	29
2.5.4.1 Cogging Torque	30
2.5.4.2 Torque Density and Torque Constant	30
2.5.5 Power	31
2.5.6 Efficiency	31
2.6 Selection of BLDC Motor for Comparison	32
2.6.1 Selected Model from other Research	32
2.6.2 Selected Model from industrial BLDC Motor	34
2.7 Summary	36

3.0	RESEARCH METHODOLOGY	37
3.1	Overall Research Methodology	37
3.2	Finite Element Method (FEM)	38
3.3	Design of Stator and Coil	42
3.4	Design of Permanent Magnet	49
3.5	Electromagnetic Characteristic of the Selected Conventional Model	55
3.6	Analysis Parameter for the Flux Leakage Reduction	59
3.7	Measurement Setup	64
	3.7.1 Static Torque Characteristic	64
	3.7.2 Torque and Speed Characteristics	68
3.5	Summary	71
4.0	RESULTS AND DISCUSSION	72
4.1	Analysis Result of Flux Leakage Reduction	72
4.2	Comparison of Conventional with Hollow Rotor	78
4.3	Fabrication of Hollow Rotor	89
4.4	Verification of Hollow Rotor (Simulation and Measurement)	91
4.5	Performance Analysis of Torque and Speed Characteristic	94
4.6	Comparison of Torque Density	97
	4.6.1 Comparison of Torque Density of Conventional and Hollow rotor	97
	4.6.2 Comparison of Torque Density of Hollow Rotor with Available Motor	98
4.7	Summary	99
5.0	CONCLUSION	100
5.1	Conclusion	100
5.2	Suggestions and Future Recommendation	101
	REFERENCES	102
	APPENDICES	110

LIST OF TABLE

TABLE	TITLE	PAGE
2.1	Selected model that used for comparison	33
2.2	Comparison between industrial BLDC motor	35
3.1	BLDC specification	45
3.2	Stator pole flux density ($I= 6A$)	47
3.3	Permanent magnet sizing	50
3.4	Conventional BLDC specification	56
3.5	Spoke type specification for flux leakage reduction analysis	60
3.6	Winding connection	66
4.1	Total Harmonic Distortion, <i>THD</i>	86
4.2	Hollow rotor specification	90
4.3	Torque ripple	93
4.4	Comparison of Spoke type BLDC	97
4.5	Comparison of Torque density Hollow rotor with available motor	99

LIST OF FIGURES

FIGURE	TITLE	PAGE
1.1	Coil arrangement in a BLDC motor	2
1.2	Conventional magnetic circuit	3
1.3	Spoke type motor construction	4
2.1	Current T_d and T_c that available in the market	10
2.2	Proposed BLDC (Marian Lukaniszyn et al.)	12
2.3	Cross sectional view of low cost BLDC motor (Lidija Petkovska et al.)	13
2.4	The FEMAG E-Bike model with 36 slots and 17 pole pairs (Adrian Christen et al.)	14
2.5	Neodymium Free Spoke-type BLDC Motor (Hyung Wook Kim et al.)	15
2.6	A Brushless DC Motor for High Torque Density (Jung-Moo Seo et al.)	16
2.7	Rotor Shape Design of BLDC Motor (Jin Hur et. al)	17
2.8	Outer Rotor Permanent Magnet BLDC (Xose M. Lopez Fernandez et al.)	18
2.9	Comparison of different PM arrangement (Hossein Asgharpour-Alamdari et al.)	19
2.10	Analytical Model of a BLDC (P. Kumar et al.)	20
2.11	Neodymium Free Spoke type (Mohammad Mizanoor Rahman et al.)	21

2.12	Commutation sequence of a three-phase BLDC motor	23
2.13	Three Phase BLDC motor vs Drive Timing	26
2.14	BLDC motor structure	27
2.15	Flux diagram	29
3.1	Research methodology that involved in this research	38
3.2	Flowchart for FEM modeling	41
3.3	Stator design	43
3.4	Number of turn configuration	43
3.5	Stator and Rotor design	44
3.6	Selection of Coil	46
3.7	Analysis result for stator and coil wire diameter selection	48
3.8	Permanent magnet design selection	49
3.9	Selection of magnet volume	51
3.10	Analysis result for magnet volume	54
3.11	Selection of model	56
3.12	Simulation result of selected conventional model (V, Φ_m)	57
3.13	Simulation result of selected conventional model (T_c, T)	58
3.14	Parameter structure	60
3.15	Analysis flowchart of the flux leakage reduction	61
3.16	Example of simulation result $r_3 = 5\text{mm}$	63
3.17	Equipment setup for static torque measurement	65
3.18	Connection diagram	66
3.19	Flowchart for static torque measurement	67
3.20	Torque and Speed measurement setup	68
3.21	Workspace Measurement Setup	69

3.22	Flowchart for Torque Speed Measurement Setup	70
4.1	Average BLDC motor analysis	75
4.2	Flux density (Stator pole, Rotor core and Air gap)	76
4.3	Percentage (Torque increment and Flux leakage reduction)	78
4.4	Conventional spoke type BLDC motor	80
4.5	Hollow rotor spoke type BLDC motor	82
4.6	Generated flux lines from the simulation	84
4.7	Comparison of back emf and flux linkage	87
4.8	Comparison of cogging torque and static torque	88
4.9	Fabricated Hollow rotor	89
4.10	Hollow-rotor Verification result	93
4.11	Dynamic measurement analysis	96

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Exploded view	111
B	Rotor	112
C	Stator	113
D	Magnet	114
E	Calculated value for Table 4.5	115
F	Magnetic Circuit of Hollow rotor	116

LIST OF ABBREVIATIONS

A	-	Area
a_g	-	Air gap
b_{sp}	-	Stator pole flux density
$BLDC$	-	Brushless DC motor
B_r	-	Radial flux density
B_θ	-	Tangential flux density
b_m	-	Magnet flux density
b_{rt}	-	Rotor flux density
c_w	-	Coil width
c_h	-	Coil height
c_s	-	Coil wire diameter
d_1	-	Distance slot opening
FEM	-	Finite Element Method
I	-	Current
m_w	-	Magnet width
m_h	-	Magnet height
m_v	-	Magnet volume
n	-	Speed
N	-	Number of turn
PM	-	Permanent magnet
T_d	-	Torque density

T_c	-	Torque constant
V_{ol}	-	Volume
p	-	Pole
r_1	-	Stator radius
r_2	-	Outer rotor radius
r_3	-	Inner rotor radius
r_1	-	Stator outer diameter
r_2	-	Rotor outer diameter
r_3	-	Inner rotor radius
R_{rp}	-	Reluctance of rotor pole
R_{ag}	-	Reluctance of air gap
R_{sps}	-	Reluctance of stator pole
R_{th}	-	Rotor teeth height
R_{sy}	-	Reluctance of stator yoke
s_{th}	-	Stator tooth height
s_{tw}	-	Stator tooth width
s_{pw}	-	Stator pole width
T	-	Torque
V	-	Voltage
ϕ	-	Flux
η	-	Efficiency

LIST OF PUBLICATIONS

Firdaus, R.N., Norhisam, M., **Farina, S.**, Nirei, M., Wakiwaka, H., Performance Comparison of Conventional Spoke and Hollow-Rotor Permanent Magnet Generator for Small Energy Harvesting Application, 2015. *Journal of the Japan Society of Applied Electromagnetics and Mechanics*, 23 (3), pp. 516-520

Norhisam, M., Firdaus, R.N., **Farina, S.**, Nirei, M., Wakiwaka, H. Performance Comparison of Conventional Spoke and Hollow-Rotor Permanent Magnet Generator for Small Energy Harvesting Application, 2014. *8th Asia Pacific Symposium on Applied Electromagnetics and Mechanics (APSAEM2014) July 22-25 2014*, pp. 76-77.

Firdaus, R.N., Suhairi, R., **Farina, S.**, Improvement of Power Density Spoke Type Permanent Magnet Generator, 2015. *11th IEEE International Conference on Power Electronics and Drive Systems (PEDS 2015), 9-12 June 2015*, pp. 197-201

Firdaus, R.N., **Farina, S.**, Suhairi, R., Karim, K. A., Jamil, M. L. M., Effect of Magnet Edge To Spoke Type BLDC Motor, 2015. *International Conference on Power, Energy and Communication Systems (IPECS 2015)*. (In press)

Firdaus, R.N., Aishah, M.Z., Suhairi, R., **Farina, S.**, Zulaika, S., Effect of Outer and Inner Stator Split-Ratio of Slotted Rotor Double Stator Permanent Magnet BLDC Motor, 2015. *International Conference on Power, Energy and Communication Systems (IPECS 2015)*. (In press)

Firdaus, R.N., **Farina, S.**, Suhairi, R., Karim, K. A., Jidin, A., Norhisam, M., Sutikno, T., Design of Hollow-Rotor Brushless DC Motor, 2016. *International Journal of Power Electronics and Drive Systems (IJPEDS)*, 7(2). (In press)

CHAPTER 1

INTRODUCTION

This chapter gives a brief explanation about the research project on improvement of torque density spoke type BLDC motor using hollow rotor topology. It consists of project background, problem statement, objectives, thesis contribution, and scope of work. Lastly, the description of the content for each chapter is presented.

1.1 Background

Brushless DC Motor (BLDC) motor has more reliable operation, more efficiency and less noise compared to brushed DC motor. BLDC motor is less heavier as compared with brushed motor with the similar output power. Brushes in a brushed DC motor, wear time being will cause sparking. It is really difficult to control spark problem in a brushed DC motor. Usually, a brushed DC motor could not be used for application which demands long life and reliability. For that reason, a BLDC motor is introduced where it is mostly used in modern devices. BLDC motor is high efficiency, and is suitable for high speed application.

For a BLDC motor, permanent magnet is inserted in the rotor. Coil is been arranged at stator. The operation of a BLDC is based on the simple force interaction between the permanent magnet and the electromagnet. In this condition, when the coil A is energized, the opposite poles of the rotor and stator are attracted to each other. As a result the rotor poles move near to the energized stator. Figure 1.1 shows coil arrangement of a BLDC motor. As the rotor nears coil A, coil B is energized. As the rotor nears coil B, coil

C is energized. After that, coil A is energized with the opposite polarity. This process is repeated, and the rotor continues to rotate. The motor will work but it has one drawback. At any instance only one coil is energized while the other two off coil greatly reduce the power output of the motor because less torque is produced due to only one coil is energized. The DC voltage required for each graph are also shown in Figure 1.1.

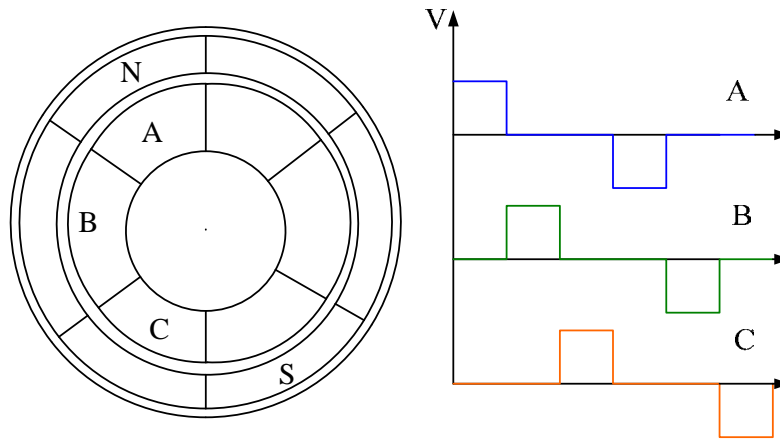


Figure 1.1: Coil arrangement in a BLDC motor (DC voltage)

To overcome this problem, a sensor named as hall effect sensor is used where it can determine rotor position and based on this information, the controller will decide which coils to energize. When coil A is energized, the other coil behind it will be energized too and it will push the rotor to rotate constantly. The combined effects produce more torque and power output from the motor.

This thesis presents improvement of torque density spoke type BLDC motor using hollow rotor topology. The improvement is made from a conventional BLDC motor and a new BLDC motor named as hollow rotor is proposed. Basically, in a conventional type BLDC motor, there will be two magnetic circuit which is in parallel where the first magnetic circuit is at air gap which will be contributing to flux around stator while the

other one is below permanent magnet area which will not be used and is called leakage flux as shown in Figure 1.2.

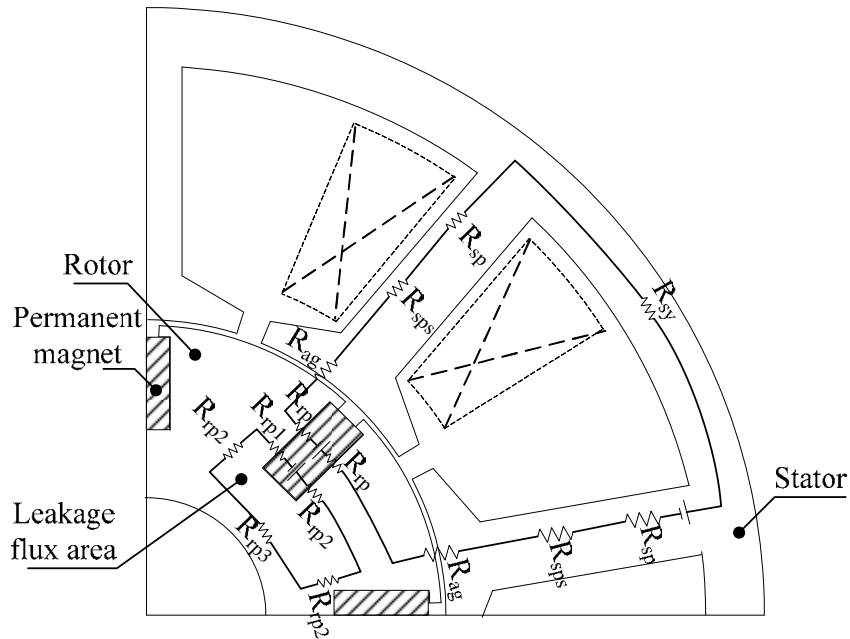


Figure 1.2: Conventional magnetic circuit

To overcome this problem, area below permanent magnet need to be completely filled by hollow. Finite Element Method (FEM) is used to simulate the magnetic characteristic including the torque waveform in this research. The proposed hollow rotor is fabricated and measured. The simulation result by FEM is verified with the measurement result.

1.2 Project Motivation

BLDC motor is commonly used and could be found in many applications such as household application and industrial application such as linear motor, servomotors or actuators for industrial robots. BLDC motor has several advantages compare to other motor type where it has less noise, less maintenance, longer life, spark free, better efficiency and energy saver. Figure 1.3 shows example of spoke type motor construction. The advantage of a spoke type motor are, it has high torque because it uses reluctance

torque and magnetic torque simultaneously as stated by Hyung Wook Kim et al. (2013). This had motivated the author to study more on BLDC motor especially spoke type for this research.



Figure 1.3: Spoke type motor construction

1.3 Problem Statement

For high motor performance, BLDC motor needs to be in high torque which will produce high torque density, T_d . Therefore, the aim of this research is to produce higher torque density, T_d at similar volume of motor and higher torque constant, T_c with high current application. Many researchers have focused on improving the torque of BLDC motor. For instance, Gyu-Hong Kang et al. (2003) studied irreversible demagnetization of permanent magnet. This irreversible demagnetization characteristics is analysed by rotor structure in term of changing radius of rotor. In a spoke type, the reluctance torque strongly influences the torque characteristics. By considering these characteristics, the motor performance in terms of magnetic flux density will proportionally increase the torque density, as stated by Gyu Hong Kang et al. (2003), Hyung Gyu Kim et al. (2010) and Gyu Hong Kang, Jin hur et al. (2003).

Another example is the study by Byoung-Kuk Lee et al. (2004), who presented a detailed comparative study of spoke type BLDC motor due to operating condition. In this study, flux barriers are designed in order to improve torque characteristics where spoke

type motor are developed with some hollow circle between permanent magnet. By using this method, magnetic flux will be concentrated in the air gap. As a result, flux barrier can maximize the torque of the spoke BLDC motor compared to conventional types as stated by Byoung Kuk Lee et al. (2004), Salon (1995) and Gyu Hong Kang et al. (2000). Mizanoor Rahman Mohammad et al. (2013) presented an analytical model for calculating the back emf and the maximum value of air gap flux density in both radial and tangential directions for internal rotor topology. The flux density in the air gap region is derived by considering the stator slot opening as stated by Mizanoor Rahman Mohammad et al. (2013). Another researcher, Hyung Wook Kim et al. (2013) proposed a method for optimizing torque density for developing the neodymium free spoke type BLDC motor. An important step during motor design is the calculation of B_r , the effective air gap flux density. B_r is contributed from the flux of magnet as mentioned by Hyung Wook Kim et al. (2013).

In summary, most of the researchers increase torque density by applying a barrier to reduce the leakage flux. This is because there is a large amount of cycling flux below the permanent magnet of conventional rotor spoke type BLDC motor. In this research, a hollow rotor topology is proposed. By using this method, all flux from magnet will flow directly through stator without having any waste of unused flux compared to other researcher solution.