


[Web](#) [Images](#) [More...](#)

ProfDatukRuddin@gmail.com

Google scholar

  
[My Citations](#) - [Help](#)

Mohd Ruddin Ab Ghani

Professor of Electrical Engineering, Universiti Teknikal Malaysia Melaka

[System Engineering and Control- Energy and Distribution Automation System-Optimization - Operational Research](#)

Verified email at utem.edu.my

[« Back to list](#)

Title

Active suspension control: Performance comparison using proportional integral sliding mode and linear quadratic regulator methods

Authors

YM Sam, Johari Halim Shah Osman, MRA Ghani

Publication date

2003/6/23

Conference name

Control Applications, 2003. CCA 2003. Proceedings of 2003 IEEE Conference on

Volume

1

Pages

274-278

Publisher

IEEE


Description

Abstract The purpose of this paper is to compare the performance of the active suspension system using two different control strategies. The first strategy utilized the proportional integral sliding mode control scheme and the second one using the linear quadratic regulator method. A quarter-car model is used in the study and the performance of the controller is compared to the linear quadratic regulator and with the existing passive suspension system. A simulation study is performed to prove the effectiveness and ...

Total citations

[Cited by 14](#)

Citations per year

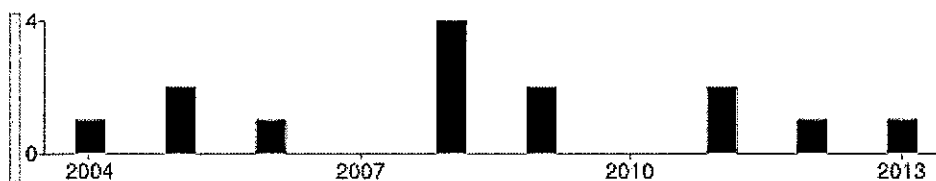

Scholar articles

Active suspension control: Performance comparison using proportional integral sliding mode and linear quadratic regulator methods

YM Sam, JHS Osman, MRA Ghani - Control Applications, 2003. CCA 2003. Proceedings of ..., 2003

Cited by 14 - [Related articles](#) - [All 2 versions](#)

[« Back to list](#)

[Edit](#)

[Export](#)

[Delete](#)

*Dates and citation counts are estimated and are determined automatically by a computer program.*

©2013 Google - [About Google Scholar](#) - [All About Google](#) - [Provide feedback](#) - [My Citations](#)

[IEEE.org](#) | [IEEE Xplore Digital Library](#) | [IEEE Standards](#) | [IEEE Spectrum](#) | [More Sites](#)



Access provided by:  
Universiti Teknikal Malaysia  
Melaka-UTEM  
[Sign Out](#)



#### SEARCH RESULTS

You searched for: **Active Suspension control: Performance comparison using proportional integral sliding mode and linear quadratic regulator methods**

1 Results returned

#### Active suspension control: performance comparison using proportional integral sliding mode and linear quadratic regulator methods

Sam, Y.M. ; Osman, J.H.S. ; Ghani, M.R.A.

Control Applications, 2003. CCA 2003. Proceedings of 2003

IEEE Conference on

Volume: 1

Digital Object Identifier: 10.1109/CCA.2003.1223325

Publication Year: 2003 , Page(s): 274 - 278 vol.1

Cited by: Papers (3)

**IEEE CONFERENCE PUBLICATIONS**

[Sign In](#) | [Create Account](#)

#### IEEE Account

[Change Username/Password](#)

[Update Address](#)

#### Purchase Details

[Payment Options](#)

[Order History](#)

[Access Purchased Documents](#)

#### Profile Information

[Communications Preferences](#)

[Profession and Education](#)

[Technical Interests](#)

#### Need Help?

[US & Canada: +1 800 678 4333](#)

[Worldwide: +1 732 981 0060](#)

[Contact & Support](#)

[About IEEE Xplore](#) | [Contact](#) | [Help](#) | [Terms of Use](#) | [Nondiscrimination Policy](#) | [Site Map](#) | [Privacy & Opting Out of Cookies](#)

A not-for-profit organization, IEEE is the world's largest professional association for the advancement of technology.

© Copyright 2013 IEEE - All rights reserved. Use of this web site signifies your agreement to the terms and conditions.

# Active Suspension Control: Performance Comparison using Proportional Integral Sliding Mode and Linear Quadratic Regulator Methods

Y. M. Sam and J. H. S. Osman  
Faculty of Electrical Engineering, University Technology of Malaysia  
81310 UTM Skudai, Johor, Malaysia

M. R. A. Ghani  
Kolej Universiti Teknikal Kebangsaan Malaysia,  
75450 Melaka, Malaysia

**Abstract**— The purpose of this paper is to compare the performance of the active suspension system using two different control strategies. The first strategy utilized the proportional integral sliding mode control scheme and the second one using the linear quadratic regulator method. A quarter-car model is used in the study and the performance of the controller is compared to the linear quadratic regulator and with the existing passive suspension system. A simulation study is performed to prove the effectiveness and robustness of the control approach.

**Index Terms**—Active suspension, sliding mode control, linear quadratic regulator, automotive control.

## I. INTRODUCTION

SEVERAL performance characteristics have to be considered in order to achieve a good suspension system [1]. These characteristics deal with regulation of body movement, regulation of suspension movement and force distribution. Ideally the suspension should isolate the body from road disturbances and inertial disturbances associated with cornering and braking or acceleration. Furthermore, the suspension must be able to minimize the vertical force transmitted to the passengers for passengers comfort. These objectives can be achieved by minimizing the vertical car body acceleration. An excessive wheel travel will result in non-optimum attitude of tyre relative to the road that will cause poor handling and adhesion. Furthermore, to maintain good handling characteristic, the optimum tyre-to-road contact must be maintained on four wheels.

An early design for automobile suspension systems focused on unconstrained optimizations for passive suspension system which indicate the desirability of low suspension stiffness, reduced unsprung mass, and an optimum damping ratio for the best controllability [2]. Thus the passive suspension system, which approach optimal characteristics had offered an attractive choice for a vehicle suspension system and had been widely used for passengers. However, the suspension spring

and damper do not provide energy to the suspension system and control only the motion of the car body and wheel by limiting the suspension velocity according to the rate determined by the designer. To overcome the above problem, active suspension systems have been proposed by various researchers [3,4,5].

Active suspension systems dynamically respond to changes in the road profile because of their ability to supply energy that can be used to produce relative motion between the body and wheel. Typically, active suspension systems include sensors to measure suspension variables such as body velocity, suspension displacement, wheel velocity and wheel or body acceleration. An active suspension is one in which the passive components are augmented by actuators that supply additional forces. These additional forces are determined by a feedback control law using data from sensors attached to the vehicle. Various control strategies such as optimal state-feedback [3], backstepping method [4], optimal state-feedback [5], fuzzy control [6] and sliding mode control [7] have been proposed in the past years to control the active suspension system. The sliding mode control has relatively simpler structure and it guarantees the system stability.

In this paper we will consider a control scheme that can improve further the ride comfort and road handling of the active suspension system. The control of the active suspension system is complicated further due to the inherent mismatched condition present in the system. The mismatched condition exist in the system due to the road profile which acts as the disturbance input.

The proposed control scheme differs from the previous sliding mode techniques in the sense that the sliding surface is based on the proportional-integral (PI) sliding mode control. The additional integral in the proposed sliding surface provides one more degree of freedom and also reduce the steady state error. It will be shown that the proposed controller would be able to overcome the mismatched condition provided a certain condition is satisfied. A computer simulation will be performed to demonstrate the effectiveness and robustness of the proposed control scheme.

Corresponding author: [yahaya@fke.utm.my](mailto:yahaya@fke.utm.my)

0-7803-7729-X/03/\$17.00 ©2003 IEEE.

## 11. DYNAMIC MODEL OF THE SUSPENSION

Most of the past active suspension designs were developed based on the quarter-car model as in Figure 1. From the figure the following state-space model of the quarter car model can be easily obtained:

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \\ \dot{x}_4 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 & 0 \\ K_a/M_s & -C_a/M_s & K_a/M_s & C_a/M_s \\ 0 & 0 & 0 & 1 \\ K_a/M_{us} & C_a/M_{us} & -(K_a + K_t)/M_{us} & -C_a/M_{us} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \end{bmatrix} + \begin{bmatrix} 0 \\ 1/M_s \\ 0 \\ -1/M_s \end{bmatrix} u_a + \begin{bmatrix} 0 \\ 0 \\ 0 \\ K_t/M_{us} \end{bmatrix} r \quad (1)$$

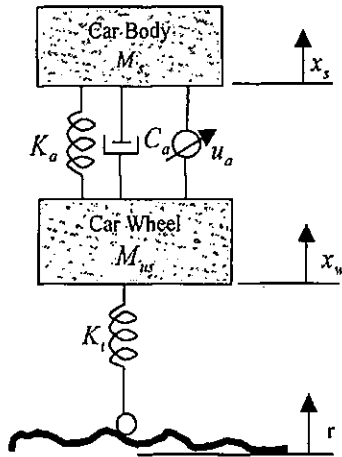


Fig. 1 A quarter car model

where  $M_s$  and  $M_{us}$  are the masses of car body and wheel respectively,  $x_s$  and  $x_w$  are the deflections of car body and wheel respectively,  $K_a$  and  $K_t$  are the spring coefficients,  $C_a$  is the damper coefficient,  $r$  is the road disturbance and  $u_a$  is the control force from the hydraulic actuator and assumed as the control input. The following terms are defined as the state variables:  $x_1 = x_s$  for car body deflection,  $x_2 = \dot{x}_s$  for car body velocity,  $x_3 = x_w$  for wheel deflection and  $x_4 = \dot{x}_w$  for wheel velocity. Equation (1) shows that the disturbance input is not in phase with the actuator input, therefore the system suffer from mismatched condition. Thus the proposed controller must be robust enough to overcome the mismatched condition so that the disturbance would not have significant effect on the performance of the system.

Hence this is the contribution of this paper which is presented in the following.

Equation (1) can be written as

$$\dot{x}(t) = Ax(t) + Bu(t) + f(t) \quad (2)$$

where  $x(t) \in \mathbb{R}^n$  is the state vector,  $u(t) \in \mathbb{R}^m$  is the control input, and the continuous function  $f(t)$  represents the uncertainties with the mismatched condition i.e  $\text{rank}[B, f(t)] \neq \text{rank}[B]$ . The following assumptions are taken as standard:

*Assumption i:* There exists a known positive constant such that  $\|f(t)\| \leq \beta$ , where  $\|\bullet\|$  denotes the standard Euclidean norm.

*Assumption ii:* The pair  $(A, B)$  is controllable and the input matrix  $B$  has full rank.

## III. SWITCHING SURFACE AND CONTROLLER DESIGN

In this study, we utilized the PI sliding surface define as follows:

$$\sigma(t) = Cx(t) - \int_0^t (CA + CBK)x(\tau) d\tau \quad (3)$$

where  $C \in \mathbb{R}^{m \times n}$  and  $K \in \mathbb{R}^{n \times m}$  are constant matrices. The matrix  $K$  satisfies  $\lambda(A + BK) < 0$  and  $C$  is chosen so that  $CB$  is nonsingular. It is well known that if the system is able to enter the sliding mode, hence  $\sigma(t) = 0$ . Therefore the equivalent control,  $u_{eq}(t)$  can thus be obtained by letting  $\dot{\sigma}(t) = 0$  [8] i.e,

$$\dot{\sigma}(t) = C\dot{x}(t) - \{CA + CBK\}x(t) = 0 \quad (4)$$

If the matrix  $C$  is chosen such that  $CB$  is nonsingular, this yields

$$u_{eq}(t) = Kx(t) - (CB)^{-1}Cf(t) \quad (5)$$

Substituting equation (5) into system (2) gives the equivalent dynamic equation of the system in sliding mode as:

$$\dot{x}(t) = (A + BK)x(t) + \{I_n - B(CB)^{-1}C\}f(t) \quad (6)$$

**Theorem 1:** If  $\|F(t)\| \leq \beta_1 = \|I_n - B(CB)^{-1}C\|\beta$  the uncertain system in equation (6) is boundedly stable on the sliding surface.

**Proof:** For simplicity, we let

$$\tilde{A} = (A + BK) \quad (6a)$$

$$\tilde{F}(t) = \{I_n - B(CB)^{-1}C\}f(t) \quad (6b)$$

and rewrite (6) as

$$\dot{\tilde{x}}(t) = \tilde{A}\tilde{x}(t) + \tilde{F}(t) \quad (7)$$

Let the Lyapunov function candidate for the system is chosen as

$$V(t) = x^T(t)Px(t) \quad (8)$$

Taking the derivative of  $V(t)$  and substituting equation (6), gives

$$\begin{aligned} \dot{V}(t) &= x^T(t)[\tilde{A}^T P + P\tilde{A}]x(t) + \tilde{F}^T(t)Px(t) + x^T(t)P\tilde{F}(t) \\ &= -x^T(t)Qx(t) + \tilde{F}^T(t)Px(t) + x^T(t)P\tilde{F}(t) \end{aligned} \quad (9)$$

where  $P$  is the solution of  $\tilde{A}^T P + P\tilde{A} = -Q$  for a given positive definite symmetric matrix  $Q$ . It can be shown that equation (9) can be reduced to:

$$\dot{V}(t) \leq -\lambda_{\min}(Q)\|x(t)\|^2 + 2\beta_1\|P\|\|x(t)\| \quad (10)$$

Since  $\lambda_{\min}(Q) > 0$ , consequently  $\dot{V}(t) < 0$  for all  $t$  and  $x \in B^c(\eta)$ , where  $B^c(\eta)$  is the complement of the closed ball  $B(\eta)$ , centered at  $x = 0$  with radius  $\eta = \frac{2\beta_1\|P\|}{\lambda_{\min}(Q)}$ . Hence, the system is boundedly stable.  $\square$

**Remark:** For the system with uncertainties satisfy the matching condition, i.e.,  $\text{rank}[B, f(t)] = \text{rank}[B]$ , then equation (6) can be reduced to  $\dot{x}(t) = (A + BK)x(t)$  [9]. Thus asymptotic stability of the system during sliding mode is assured.

We now design the control scheme that drives the state trajectories of the system in equation (2) onto the sliding surface  $\sigma(t) = 0$  and the system remains in it thereafter.

For the uncertain system in equation (2) satisfying assumptions (i) and (ii), the following control law is proposed:

$$u(t) = -(CB)^{-1}[CAx(t) + \phi\sigma(t)] - k(CB)^{-1} \frac{\sigma(t)}{\|\sigma(t)\| + \delta} \quad (11)$$

where  $\phi \in \mathcal{R}^{m \times m}$  is a positive symmetric design matrix,  $k$  and  $\delta$  are the positive constants.

**Theorem 2:** The hitting condition of the sliding surface (3) is satisfied if

$$\|A + BK\|\|x(t)\| \geq \|f(t)\| \quad (12)$$

**Proof:** In the hitting phase  $\sigma^T(t)\sigma(t) > 0$ ; using the

Lyapunov function candidate  $V(t) = \frac{1}{2}\sigma^T(t)\sigma(t)$ , we obtain

$$\begin{aligned} \dot{V}(t) &= \sigma^T(t)\dot{\sigma}(t) \\ &= \sigma^T(t)[-(CA + CBK)x(t) - \phi\sigma(t) - \frac{k\sigma(t)}{\|\sigma(t)\| + \delta} + Cf(t)] \\ &\leq -\left[\|\phi\| + \frac{k}{\|\sigma(t)\| + \delta}\right]\|\sigma(t)\|^2 \\ &\quad + \|C\|\|A + BK\|\|x(t)\| - \|C\|\|f(t)\|\|\sigma(t)\| \end{aligned} \quad (13)$$

It follows that  $\dot{V}(t) < 0$  if condition (12) is satisfied. Thus, the hitting condition is satisfied.  $\square$

#### IV. SIMULATION AND DISCUSSION

The mathematical model of the system as defined in equation (2) and the proposed proportional integral sliding mode controller (PISMC) in equation (11) were simulated on computer. For the comparison purposes, the performance of the PISMC is compared to the linear quadratic regulator (LQR) control approach. We assume a quadratic performance index in the form of:

$$J = \frac{1}{2} \int_0^\infty (x^T Q x + u^T R u) dt \quad (14)$$

where the matrix  $Q$  is symmetric positive semi-definite and  $R$  is symmetric positive definite. Then the optimal linear feedback control law is obtained as

$$u = -Kx \quad (15)$$

where  $K$  is the designed matrix gain.

Numerical values for the model parameters are taken from [3], and are as follows:

$M_s = 290$  kg,  $M_{us} = 59$  kg,  $K_a = 16812$  N/m,

$K_t = 190000$  N/m,  $C_a = 1000$  N/(m/sec)

Let the set of typical road disturbance be in the form of

$$r(t) = \begin{cases} a(1 - \cos(8\pi t))/2 & \text{if } 0.50 \leq t \leq 0.75 \\ & \text{and } 3.00 \leq t \leq 3.25 \\ 0 & \text{otherwise} \end{cases}$$

where  $a$  denotes the bump amplitude (see Fig.2). This type of road disturbance has been used by [4,10] in their studies. Furthermore, the maximum travel distance of the suspension travel is as suggested by [4] that is  $\pm 8$ cm has been used.

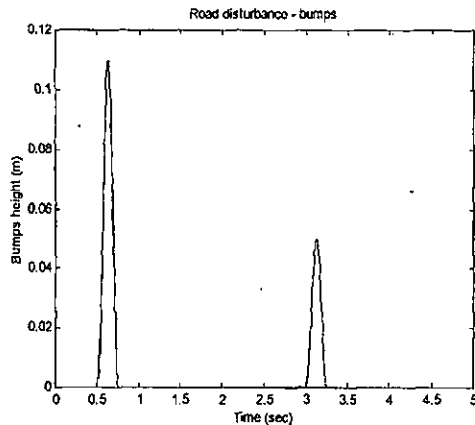


Fig. 2. Typical road disturbance

In the design of the LQR controller, weighting matrices  $Q$  and  $R$  are selected as  $Q = \text{diag}[q_1, q_2, q_3, q_4]$  where  $q_1 = q_2 = q_3 = q_4 = 1 \times 10^4$  and  $R = 1 \times 10^{-4}$  respectively. Thus, the designed gains of the LQR controller are  $k_1 = 4806$ ,  $k_2 = 4709$ ,  $k_3 = 35026$  and  $k_4 = 3982$ . The values of the matrix  $K$  for the PISMIC is similar to the values of the designed gains in the LQR controller i.e.  $K = [4806 \ 4709 \ 35026 \ 3982]$  such that  $\lambda(A+BK) = \{-10, -20, -30, -50\}$ . In this simulation the following values are selected for the PISMIC:  $C = [10e-3 \ 4e-3 \ 0.2 \ 1e-4]$ ,  $\phi = 100$ ,  $k=1$  and  $\delta = 0.001$ .

In order to fulfill the objective of designing an active suspension system i.e. to increase the ride comfort and road handling, there are two parameters to be observed in the simulations. The two parameters are the car body acceleration and the wheel deflection. Figure 3a shows the suspension travel of both controllers for an active suspension system and a passive suspension system for comparison purposes. The result shows that the suspension travel within the travel limit i.e.  $\pm 8\text{cm}$ , and the result also shows that the active suspension utilizing the PISMIC technique perform better as compared to the others. Figure 3b and Figure 3c illustrates clearly how the PISMIC can effectively absorb the vehicle vibration in comparisons to the LQR method and the passive system. The body acceleration in the PISMIC design system is reduced significantly, which guarantee better ride comfort. Moreover the wheel deflection is also smaller using the proposed controller. Therefore it is concluded that the active suspension system with the PISMIC improves the ride comfort while retaining the road handling characteristics, as compared to the LQR method and the passive suspension

## V. CONCLUSION

The paper presents a robust strategy in designing a controller for an active suspension system which is based on variable structure control theory, which is capable of satisfying all the pre-assigned design requirements within the actuators limitation. The mathematical model of a quarter car is presented in a state space form. A detailed study of the proportional integral sliding mode control algorithm is presented and solved the mismatched condition problem in the mathematical model. The performance characteristics and the robustness of the active suspension system are evaluated by two types of controllers, and then compared with the passive suspension system.

The result shows that the use of the proposed proportional integral sliding mode control technique proved to be effective in controlling vehicle and more robust compared to the linear quadratic regulator method and the passive suspension system.

## REFERENCES

- [1] M. Appleyard and P.E. Wellstead, "Active suspension : some background", *Proc. Control Theory Applications*, Vol. 142, pp. 123-128, 1995.
- [2] A.G. Thompson, "Design of Active Suspension", *Proc. Inst. Mech. Engrs*, Vol. 185, pp. 553-563, 1971.
- [3] A. Alleyne and J.K. Hedrick, "Nonlinear Adaptive Control of Active Suspensions", *IEEE Trans. Control System Technology*, Vol. 3, pp. 94-101, 1995.
- [4] J.S. Lin and I. Kanellakopoulos, "Nonlinear Design of Active Suspension", *IEEE Control System Magazine*, Vol. 17, pp. 45-59, 1997.
- [5] E. Esmailzadeh, and H.D. Taghirad, "Active Vehicle Suspensions with Optimal State-Feedback Control", *Journal of Mechanical Science*, Vol. 200, pp. 1-18, 1997.
- [6] T. Yoshimura, K. Nakaminami, M. Kurimoto and J. Hino, "Active suspension of passengers cars using linear and fuzzy-logic controls", *Control Engineering Practice*, Vol. 7, pp. 41-47, 1999.
- [7] T. Yoshimura, A. Kume, M. Kurimoto and J. Hino, "Construction of an active Suspension system of a quarter car model using the concept of sliding mode control", *Journal of Sound and Vibration*, Vol. 239, pp. 187-199, 2001.
- [8] U. Itkis, *Control System of Variable Structure*, New York :Wiley. Eds. 1976.
- [9] C. Edward, and S.K. Spurgeon, *Sliding Mode control: Theory and Applications*, London:Taylor and Francis. 2000.
- [10] F.J. D'Amato, and D.E. Viasallo, "Fuzzy Control for Active Suspensions", *Mechatronics* Vol. 10, pp. 897-920, 2000.

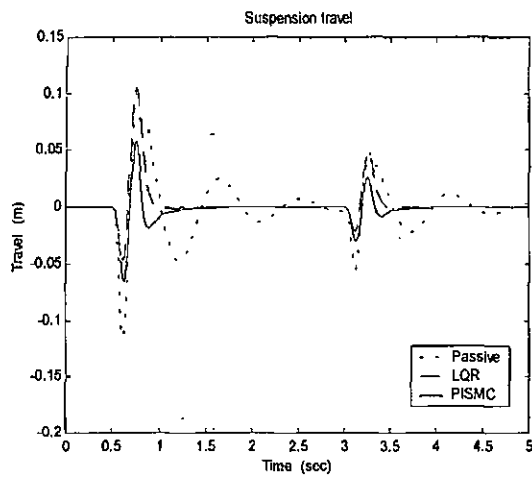


Fig. 3(a) Suspension travel

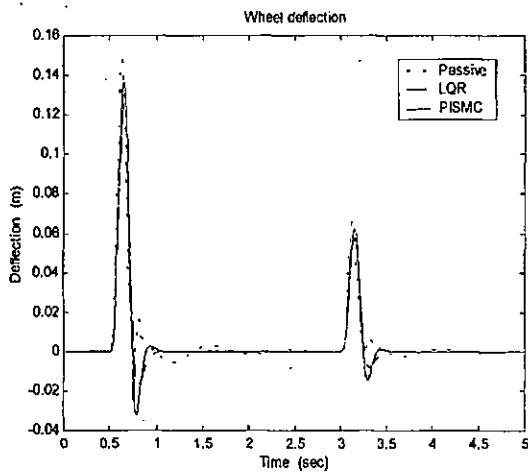


Fig. (3b) Wheel deflection

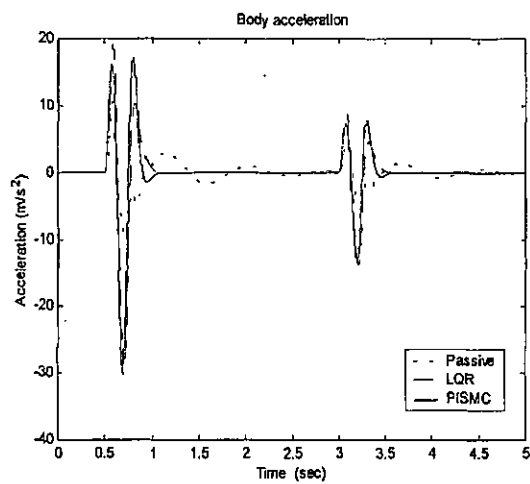


Fig. (3c) Car body acceleration