



Faculty of Mechanical Engineering

**MODELLING AND SIMULATION OF WATER-BASED
HYDRAULIC HYBRID DRIVE LINE**

Saiful Akmal bin Sabaruddin

Master of Science in Mechanical Engineering

2018

**MODELLING AND SIMULATION OF WATER-BASED HYDRAULIC HYBRID
DRIVELINE**

SAIFUL AKMAL BIN SABARUDDIN

**A thesis submitted
in fulfillment of the requirements for the degree of Master of Science
in Mechanical Engineering**

Faculty of Mechanical Engineering

UNIVERSITI TEKNIKAL MALAYSIA MELAKA

2018

DECLARATION

I declare that this thesis entitled “Modelling And Simulation of Water-Based Hydraulic Hybrid Driveline” is the result of my research except as cited in the references. The thesis has not been accepted for any degree and is not concurrently submitted in the candidature of any other degree.

Signature :

Name : SAIFUL AKMAL BIN SABARUDDIN

Date :

APPROVAL

I hereby declare that I have read this thesis and in my opinion, this thesis is sufficient in terms of scope and quality as a partial fulfillment of Master of Science in Mechanical Engineering

Signature :
Supervisor Name : DR. AHMAD ANAS BIN YUSOF
Date :

DEDICATION

This thesis is dedicated to my family. Thank you for your continuous support during my important educational years. Without their patience, understanding and most of all love, the completion of this work would not have been possible.

To my beloved father, mother, and wife

Sabaruddin b Manja, Najima bte Abd Shukoor & Ahliah Saiful

ABSTRACT

Typical hydraulic hybrid system vehicles depend on oil-based hydraulic fluid. Due to the natural concerns of environment and safety, promote the uses of the water-based hydraulic hybrid system. The main focus of this thesis is to investigate the potential of using water-based hydraulic technology instead of the current oil-based hydraulic technology. The main subject of this technology is in heavy commercial vehicles that frequently in a stop and go modes such as garbage trucks or delivery trucks that produce an immense amount of energy in a moment. The hydraulic hybrid driveline presented in this research is a series type, and the output of the driveline is connected to a Mitsubishi Fuso 6D34-0AT2 as a load to the system. In addition, the driveline is contained of hydraulic component (accumulator, hydraulic pump/motor) which serves to store and distribute power. HyspinAWS68 (mineral oil) was used as a pressure medium to create a comparison with water. This research includes an extensive study on the component modeling and simulation by using Matlab/Simulink and mainly based on the platform of Simhydraulics for the hydraulic flow and Simdriveline for the mechanical line. The focus part of modeling is primarily at 4 parts of the driveline which is system pressure, volumetric displacement, total accumulator volume, high-pressure accumulator pre-charge pressure. Based on the simulation, several data were collected such as time taken to fully charged, pressure, volumetric flow rate, torque, power, vehicle speed and also efficiency. The simulation result indicates that as one might expect that HyspinAWS68 has a higher performance of hydraulic hybrid driveline compared to water. This is due to the weakness of water properties as a pressure medium in terms of the density, viscosity, bulk modulus that causes a significant effect on the efficiency and performance of the hydraulic hybrid driveline. Several serious issues faced by water are internal leakage, pressure drop and also the capability to be compressed. In spite of this, the implementation of water hydraulic a potential response that required a depth study in terms of the properties and the component parameter to achieve the optimum performance of water-based hydraulic hybrid driveline. In future, experimental research on the performance of water-based hydraulic hybrid is required.

ABSTRAK

Kebiasaan kenderaan hibrid hidraulik bergantung kepada cecair hidraulik berasaskan minyak. Oleh itu, kebimbangan alam sekitar dan keselamatan mencetuskan penggunaan sistem hibrid hidraulik berasaskan air. Fokus utama kajian ini adalah untuk mengkaji kemungkinan menggunakan teknologi hidraulik berasaskan air berbanding teknologi hidraulik berasaskan minyak. Subjek utama teknologi ini adalah kepada kenderaan komersil berat yang kerap dalam mod berhenti dan gerak seperti trak sampah atau trak penghantaran yang mampu menghasilkan jumlah tenaga yang besar dalam seketika. Hibrid hidraulik yang diperkenalkan dalam penyelidikan ini adalah jenis siri dan disambungkan kepada Mitsubishi Fuso 6D34-0AT2 sebagai beban kepada sistem. Di samping itu, sistem ini mengandungi komponen hidraulik (penumpuk, pam/motor hidraulik) yang berfungsi untuk menyimpan dan mengedarkan kuasa. Selain itu, hyspinAWS68 (minyak mineral) digunakan sebagai medium tekanan untuk perbandingan dengan air. Kajian ini merangkumi kajian menyeluruh mengenai pemodelan dan simulasi komponen dengan menggunakan Matlab / Simulink berdasarkan perisian Simhydraulics untuk aliran hidraulik dan Simdriveline untuk aliran mekanikal. Tumpuan pemodelan adalah pada 4 bahagian iaitu tekanan sistem, anjakan volumetrik, isipadu penumpuk, tekanan awal di penumpuk tekanan tinggi. Berdasarkan simulasi, beberapa data dijana seperti masa yang diambil untuk dicas sepenuhnya, tekanan, kadar aliran volumetrik, tork, kuasa, kelajuan kenderaan dan juga kecekapan. Hasil simulasi menunjukkan bahawa HyspinAWS68 mempunyai prestasi yang lebih baik berbanding dengan air. Ini adalah disebabkan kelemahan sifat-sifat air sebagai medium tekanan iaitu dari segi ketumpatan, kelikatan, modulus pukal yang menyebabkan kesan yang jelas ke atas kecekapan dan prestasi hidraulik hibrid sistem. Sehubungan itu, beberapa isu serius yang dihadapi oleh air adalah kebocoran dalaman, penurunan tekanan dan juga keupayaan untuk dimampatkan. Walau bagaimanapun, pelaksanaan hidraulik air masih memberi tindak balas yang positif. Oleh itu, sistem ini memerlukan kajian mendalam dari segi sifat dan parameter komponen untuk mencapai prestasi optimum hibrid hidraulik berasaskan air. Pada masa akan datang, perlunya kajian eksperimen mengenai prestasi hibrid hidraulik berasaskan air.

ACKNOWLEDGEMENTS

Alhamdulillah rabbil 'alamiin

First and foremost, I would like to acknowledge and extend my heartfelt gratitude to my supervisor, Dr. Ahmad Anas bin Yusof from Faculty of Mechanical Engineering, Universiti Teknikal Malaysia Melaka (UTeM) for his guidance, assistance, patience, and encouragement have been enormous importance to my research and the completion of the thesis. He continually and realistically conveyed a spirit of adventure about research, and excitement regarding teaching.

I would also like to express my greatest gratitude to Engr. Mohd Noor Asril bin Saadun from Faculty of Mechanical Engineering, co-supervisor of this project for his advice and suggestions. I would also like to express my deepest gratitude Mr. Ikhmal Hisham bin Ibrahim the assistant engineer from thermal fluid laboratory, Faculty of Mechanical Engineering. In addition, I would like to thank Mr. Faizil bin Wasbari, for his continuous guidance and help about the project of hydraulic hybrid vehicles. I also appreciate the help of Centre for Advanced Research on Energy, Universiti Teknikal Malaysia Melaka in term of technical assistance in conducting the research.

Most especially to my family and my wife. Words alone cannot express what I owe them for their encouragement, and their patient, love enabled me to complete this thesis. I am also grateful for the support and friendship of the members of the water hydraulic technology group. Lastly, thank you to everyone who had been to the crucial parts of realization of this project.

TABLE OF CONTENTS

	PAGE
DECLARATION	
APPROVAL	
DEDICATION	
ABSTRACT	i
ABSTRAK	ii
ACKNOWLEDGEMENTS	iii
TABLE OF CONTENTS	iv
LIST OF TABLES	vi
LIST OF FIGURES	viii
LIST OF APPENDICES	xiii
LIST OF ABBREVIATIONS	xiv
LIST OF PUBLICATIONS	xvii
CHAPTER	
1. INTRODUCTION	1
1.1 Hydraulic Hybrid Vehicle	1
1.2 Problem Statement	2
1.3 Thesis Objective	3
1.4 Thesis Outline	3
2. LITERATURE REVIEW	6
2.1 System Description	6
2.1.1 Hydraulic Hybrid and Conventional Configuration	10
2.2 Water Hydraulic System	14
2.2.1 Fluid Properties	15
2.3 System Modelling	29
2.3.1 Gas-Charged Accumulator	29
2.3.2 Hydraulic Pump/Motor	30
3. MODELLING OF A SERIES HYDRAULIC HYBRID DRIVELINE	32
3.1 System Description	33
3.1.1 Charge Mode	35
3.1.2 Discharge Mode	38
3.2 Component Specification Determination	40
3.2.1 Hydraulic Pump HP	40
3.2.2 Hydraulic Motor HM	43
3.2.3 Accumulator HPAcc/LPAcc	46

3.2.4 Mitsubishi Fuso 6D34-0AT2	50
3.3 Parameter of the Simulation	53
3.4 Research Limitation and Assumption	58
4. RESULT AND DISCUSSION	60
4.1 Modelling of Hydraulic Hybrid Driveline	61
4.1.1 Effect of System Pressure on the Hydraulic Hybrid Driveline	61
4.1.2 Effect of Volumetric Displacement on the Hydraulic Hybrid Driveline	76
4.1.3 Effect of Total Accumulator Volume on the Hydraulic Hybrid Driveline	85
4.1.4 Effect of Pre-charge Pressure at HPAcc on the Hydraulic Hybrid	95
4.2 Selection of Optimal Hydraulic Hybrid Driveline	103
4.2.1 Optimal Selection of System Pressure	103
4.2.2 Optimal Selection of Volumetric Displacement	105
4.2.3 Optimal Selection of Total Accumulator Volume	107
4.2.4 Optimal Selection of Pre-charge Pressure at HPAcc	109
4.3 Hydraulic Hybrid Driveline Circuit Validation	111
4.3.1 Hydraulic Motor	111
4.3.2 High-Pressure Accumulator, HPAcc	113
5. CONCLUSION AND RECOMMENDATIONS FOR FUTURE RESEARCH	114
5.1 Summary	114
5.2 Contributions	116
5.3 Future Works	117
REFERENCES	119
APPENDICES	132

LIST OF TABLES

TABLE	TITLE	PAGE
2.1	Properties and the main advantages and disadvantages of water as a hydraulic fluid	22
2.2	Important characteristics of water compared to other hydraulic liquids (Trostmann et al., 2001)	26
3.1	Mitsubishi Fuso 6D34-0AT2 Specification (Fuso, 2012)	52
3.2	Hydraulic Fluid Properties	53
3.3	Components Specification	55
3.4	Simulation Variables Parameter	57
4.1	Effect of pressure system during charge mode at HPAcc	61
4.2	Effect of pressure system during discharge mode at HM and Mitsubishi Fuso 6D34-0AT2	70
4.3	Effect of volumetric displacement during charge mode at HPAcc	76
4.4	Effect of volumetric displacement during discharge mode at HM and Mitsubishi Fuso 6D34-0AT2	82
4.5	Effect of total accumulator volume during charge mode at HPAcc	85
4.6	Effect of total accumulator volume during discharge mode at HM and Mitsubishi Fuso 6D34-0AT2	94
4.7	Charge Mode – At High-Pressure Accumulator, HPAcc	95

4.8	Discharge Mode – At Fixed Displacement Motor, HM	98
4.9	Optimal criteria of system pressure for water-based hydraulic driveline	103
4.10	Optimal criteria of volumetric displacement for water-based hydraulic driveline	105
4.11	Optimal criteria of total accumulator volume for water-based hydraulic driveline	107
4.12	Optimal criteria of pre-charge pressure for water-based hydraulic driveline	109
5.1	Optimal modeling of water-based hydraulic hybrid driveline	115

LIST OF FIGURES

FIGURE	TITLE	PAGE
1.1	The basic mechanism of a hydraulic hybrid system configured by the United States Environmental Protection Agency's (EPA) (Kargul et al., 2015)	2
2.1	Energy vs. Power density of different energy storage systems (Murrenhoff, 2012)	9
2.2	Generic power flow model (Stecki and Matheson, 2005)	11
2.3	Conventional driveline layout (Scheme 1) (Stecki and Matheson, 2005)	11
2.4	Layout of conventional driveline (Murrenhoff, 2012)	11
2.5	Serial driveline layout (Scheme 2) (Stecki and Matheson, 2005)	12
2.6	Series Hydraulic Hybrid Configuration (Diego-Ayala, 2013)	12
2.7	System efficiency and power flow diagrams of a series hydraulic hybrid vehicle (Molla, 2010)	13
2.8	The effect of pressure and temperature on liquid density.	16
2.9	The illustration of shear stress and shear rate of fluid in determining the value of viscosity.	18
2.10	Hagen-Poiseuille concept in a pipeline.	19

2.11	(a) Kinematic viscosity of water with temperature and pressure, (b) Kinematic viscosity of a mineral oil with temperature and pressure (Trostmann et al. 2001).	21
2.12	Basic principle and illustration of bulk modulus and compressibility	24
2.13	Comparison of the Solubility of Air in Water with that of Other Hydraulic Pressure Media as a Function of Absolute Pressure (Trostmann et al. 2001).	25
2.14	Classification of hydraulic fluids (Rexroth, 2008)	28
2.15	Viscosity-temperature chart for HL, HLP, HLPD (Bosch Rexroth, 2003)	28
2.16	State of charge of the accumulator.	29
3.1	Simplified hydraulic hybrid driveline circuit	34
3.2	Hydraulic hybrid driveline circuit by using Matlab/Simulink	34
3.3	Brake and throttle pedal input signal (charge and discharge)	35
3.4	Hydraulic hybrids driveline (Charge mode)	36
3.5	Hydraulic hybrids driveline (Charge mode) by using Matlab/Simulink	37
3.6	Input speed at flywheel motor mask	37
3.7	Hydraulic hybrids driveline (Discharge mode)	38
3.8	Hydraulic hybrids driveline (Discharge mode) by using Matlab/Simulink	39
3.9	Mitsubishi Fuso 6D34-0AT2 simple transmission, wheels, and truck body structure	39
3.10	Basic illustration of input and output power of the hydraulic pump	40
3.11	Basic illustration of input and output power of the hydraulic motor	43

3.12	Partition of the volume in the accumulator (Tucker, 2015)	46
3.13	Model of Mitsubishi Fuso 6D34-0AT2 (Fuso, 2012)	51
3.14	Mitsubishi Fuso 6D34-0AT2 Power and Torque curve (Fuso, 2012)	51
3.15	Optimum viscosity range for particular volumetric displacement	54
4.1	Time taken to fully charged HPAcc during charging mode	62
4.2	Volumetric flow rate of HyspinAWS68 and water	63
4.3	Effective volume of HPAcc based on the time changes at 300 bar	64
4.4	Effect of pressure at HPAcc based on the changes of system pressure	65
4.5	Volumetric flow rate of HyspinAWS68 and water at 400 bar and 500bar	66
4.6	The effect of HPAcc effective volume on the changes of system pressure	67
4.7	Energy density of HPAcc during charging mode	68
4.8	The effect of HM torque during discharge mode	69
4.9	Internal leakage at HM during discharge mode	70
4.10	The effect of HM shaft speed during discharge mode	71
4.11	HM volumetric flow rate at 400 bar, and 500 bar	72
4.12	Pressure spike at HyspinAWS68 at 400 bar and 500 bar	72
4.13	HM volumetric efficiency during discharge mode	73
4.14	Mitsubishi Fuso 6D34-0AT2 optimum speed during discharge mode	74
4.15	Power losses at HM during discharge mode	74
4.16	Total efficiency of HM during discharge mode	75
4.17	Volumetric flow rate of HyspinAWS68 and water	77
4.18	Time taken to fully charged HPAcc during charging mode	78

4.19	Pressure of HPAcc during charging mode	79
4.20	Effective volume of HPAcc during charging mode	79
4.21	Energy density of HPAcc during charging mode	81
4.22	The effect of HM torque during discharge mode	82
4.23	The effect Mitsubishi Fuso 6D34-0AT2 speed during discharge mode	83
4.24	The effect of total efficiency at HM during discharge mode	84
4.25	Time taken to fully charged HPAcc during charging mode	86
4.26	Volumetric flow rate of HyspinAWS68 and water	86
4.27	Effective volume of HPAcc based on the time	87
4.28	Energy density and energy storage of HPAcc during charging mode	88
4.29	Effect of pressure at HPAcc based on the changes of system pressure	89
4.30	The effect of HM torque during discharge mode	90
4.31	HM pressure difference during discharge mode	91
4.32	volumetric flow rate and system pressure of HM during discharge mode	91
4.33	Mitsubishi Fuso 6D34-0AT2 optimum speed during discharge mode	92
4.34	Total efficiency of HM during discharge mode	93
4.35	Power losses at HM during discharge mode	93
4.36	Time taken to fully charged HPAcc during charging mode	96
4.37	Effective volume of HPAcc based on the time	96
4.38	Volumetric flow rate of HyspinAWS68 and water	97
4.39	The effect of HM torque during discharge mode	99
4.40	Volumetric flow rate of HyspinAWS68 and water	99
4.41	Pressure difference of HyspinAWS68 and water	100
4.42	Mitsubishi Fuso 6D34-0AT2 optimum speed during discharge mode	101

4.43	Total efficiency of HM during discharge mode	101
4.44	Power losses at HM during discharge mode	102
4.45	Optimal selection of system pressure for water-based hydraulic hybrid driveline	104
4.46	Optimal selection of volumetric displacement for water-based hydraulic driveline	106
4.47	Optimal selection of total accumulator volume for water-based hydraulic driveline	108
4.48	Optimal selection of pre-charge pressure for water-based hydraulic driveline	110
4.49	Correction factor of HM torque for oil-based hydraulic motor	112
4.50	Correction factor of HM torque for water-based hydraulic motor	112
4.51	Correction factor of HPAcc in term of effective volume	113

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Castrol HyspinAWS68 technical data	132
B	Hydraulic fluids on a mineral basis for axial piston units	133
C1	Bladder Accumulator Hydac technical data	134
C2	Bladder Accumulator state changes	135
D1	Bosch A4FM axial piston motor technical data	136
D2	A4FM axial piston motor flow and torque specification	137
E	Janus Motor technical data	138
F	Mitsubishi Fuso 6D34-0AT2 technical data	139
G	Matlab/Simulink block parameter	141
H1	Effect of System Pressure	144
H2	Effect of Volumetric Displacement	146
H3	Effect of Total Accumulator Volume	149
H4	Effect of Pre-charge Pressure	151
I	Optimal selection of hydraulic hybrid driveline	154
J	MATLAB License Certificate	157

LIST OF ABBREVIATIONS

ρ	-	Density
M	-	Mass
V	-	Volume
ν	-	Kinematic viscosity
ν	-	Dynamic viscosity
HP	-	Hydraulic pump
HM	-	Hydraulic motor
HPAcc	-	High-pressure accumulator
LPAcc	-	Low-pressure accumulator
CV	-	Charge valve
DV	-	Discharge valve
PRV	-	Pressure relief valve
t	-	Time
$P_{in\ HP}$	-	Power input hydraulic pump
$P_{out\ HP}$	-	Power output hydraulic pump
T_{HP}	-	Torque hydraulic pump
n_{HP}	-	Shaft speed hydraulic pump
D_{HP}	-	Volumetric displacement hydraulic pump
Δp_{HP}	-	Pressure difference hydraulic pump

q_{HP}	-	Volumetric flow rate hydraulic pump
$\eta_{v HP}$	-	Volumetric efficiency hydraulic pump
$\eta_{m HP}$	-	Mechanical efficiency hydraulic pump
$\eta_{t HP}$	-	Total efficiency hydraulic pump
$P_{in HM}$	-	Power input hydraulic motor
$P_{out HM}$	-	Power output hydraulic motor
$P_{lo HM}$	-	Power losses hydraulic motor
T_{HM}	-	Torque hydraulic motor
n_{HM}	-	Shaft speed hydraulic motor
D_{HM}	-	Volumetric displacement hydraulic motor
Δp_{HM}	-	Pressure difference hydraulic motor
q_{HM}	-	Volumetric flow rate hydraulic motor
$\eta_{v HM}$	-	Volumetric efficiency hydraulic motor
$\eta_{m HM}$	-	Mechanical efficiency hydraulic motor
$\eta_{t HM}$	-	Total efficiency hydraulic motor
K_{poi}	-	Hagen-Poiseuille coefficient
$T_{friction HM}$	-	Torque friction
T_0	-	No-load torque parameter
K_{TP}	-	Friction torque vs pressure gain coefficient
ρ_{nom}	-	Nominal density
ν_{nom}	-	Nominal kinematic viscosity
n_{nom}	-	Nominal shaft speed
Δp_{nom}	-	Nominal pressure
$\eta_{v nom}$	-	Nominal volumetric viscosity
V_T	-	Total accumulator volume

V_F	-	Volume of fluid chamber
V_C	-	Effective volume
V_{dead}	-	Min gas volume
V_{init}	-	Initial fluid volume
k	-	Specific heat ratio (adiabatic index)
q	-	Volumetric flowrate
q_F	-	Fluid volumetric flowrate
p_o	-	Pre-charge pressure
p_{atm}	-	Atmospheric pressure (101325 Pa)
p_{hs}	-	Hard-stop contact pressure
p_G	-	Gas pressure
$p_{G\ min}$	-	Minimum gas pressure
$p_{G\ max}$	-	Maximum gas pressure
E_{HPAcc}	-	Energy stored in HPAcc
$E_{d\ HPAcc}$	-	Energy density in HPAcc
GVM	-	Gross Vehicle Mass
GCM	-	Gross Combination Mass
SG1	-	Simple Gear 1
SG2	-	Simple Gear 2
V	-	Vehicle speed
C	-	Correction factor

LIST OF PUBLICATIONS

1. Saiful Akmal, S., Yusof, A.A., Noor, M., Saadun, A. and Ghazali, R., 2017. Application of water as pressure medium in hydraulic hybrid system. *ARPN Journal of Engineering and Applied Sciences*, 12(16), pp.4824–4830.
2. Yusof, A.A., Saiful Akmal, S., Saadun, M.N.A. and Wasbari, F., 2018. Volume displacement simulation impact on the water hydraulic hybrid driveline performance. *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, 43(1), pp.20–36.

CHAPTER 1

INTRODUCTION

1.1 Hydraulic Hybrid Vehicle

Heavy commercial vehicles that frequently in a stop and go modes such as garbage trucks or delivery trucks produce an immense amount of energy in a moment (Lindzus and Ag, 2008). This energy which is generated from a high load of the engine is converted to waste heat energy that released to the airstream. Precisely, when a conventional vehicle slows down or decelerates, the friction of brake pads and wheels produce heat that is converted from the kinetic energy. This heat is dissipated into the air that causes an effective wasted energy up to 30% of the vehicle's generated power (Valente and Ferreira, 2012).

Hydraulic hybrid system or hydraulic regenerative braking system is a mechanism that stored a portion of the kinetic energy from the braking momentum as potential energy in the form of pressurized liquid. Figure 1.1 shows the hydraulic hybrid system develop by the United States Environmental Protection Agency's (EPA). The pressurized liquid is compressed by a hydraulic pump to occupy the high-pressure accumulator as an energy storage. The energy is kept up until it is required by the vehicle, by which the pressurized liquid is released from the accumulator as the vehicle accelerates. The pressurized liquid generates the drive shaft while the engine remains idle. As the vehicle achieve the desired speed or the accumulator is emptied, the engine is taking over to continue the process that

is beyond the capability of the accumulator (Kumar, 2012; Clegg, 1996; Lindzus and Ag, 2008; Valente and Ferreira, 2012).

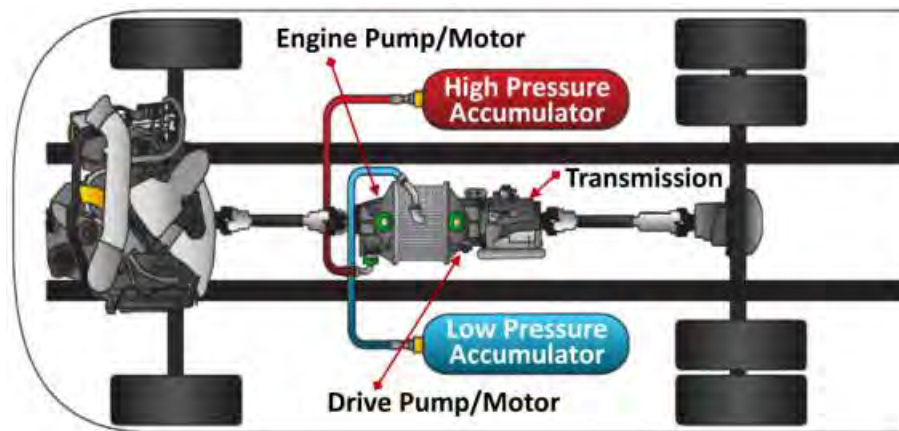


Figure 1.1: The basic mechanism of a hydraulic hybrid system configured by the United States Environmental Protection Agency's (EPA) (Kargul et al., 2015)

1.2 Problem Statement

Typical hydraulic hybrid vehicles depend on petroleum-based hydraulic fluid. Essential concerns of fire and safety in hydraulic systems promote the use of the water-based hydraulic system. Mineral oil used in hydraulic oil equipment poses a fire hazard in the event of a spillage or leakage. This is especially critical in vehicle accident scenarios where the oil spillage might trigger fire mishaps (Lim, Chua and YB He, 2003; Yusof, Mat and Din, 2013; Yusof, Wasbari and Ibrahim, 2013; Yusof et al., 2013; Zaili et al., 2014; Yusof et al., 2014). Through the usage of water hydraulics, problems related to safety and contamination of oil hydraulics in conventional hydraulic hybrid technology can be avoided.

Water hydraulics can be simplified as a fluid power system which is using water as a medium transmission of energy and power (New Hampshire Department of Environmental Services, 2014). The application of water as the transmission medium is a new concept in the industry as commonly mineral oils or other fluids are more familiar with