

# Assessment of the renewable energy generation towards net-zero energy buildings: A review



Asam Ahmed<sup>a</sup>, Tianshu Ge<sup>b</sup>, Jinqing Peng<sup>c</sup>, Wei-Cheng Yan<sup>d</sup>, Boon Tuan Tee<sup>e</sup>, Siming You<sup>a,\*</sup>

<sup>a</sup>James Watt School of Engineering, University of Glasgow, Glasgow G12 8QQ, United Kingdom

<sup>b</sup>Key Laboratory of Power Mechanical Engineering, Institute of Refrigeration and Cryogenics, Shanghai Jiao Tong University, MOE, Shanghai, PR China

<sup>c</sup>College of Civil Engineering, Hunan University, Changsha, Hunan, PR China

<sup>d</sup>School of Chemistry and Chemical Engineering, Jiangsu University, Zhenjiang, Jiangsu 212013, PR China

<sup>e</sup>Centre for Advanced Research on Energy, Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, 76100 Durian Tunggal, Melaka, Malaysia

## ARTICLE INFO

### Article history:

Received 19 July 2021

Revised 18 November 2021

Accepted 29 November 2021

Available online 3 December 2021

### Keywords:

Net-zero energy buildings

Renewable energy

Wind power

Solar

Bioenergy

Heat pump

Hydropower

## ABSTRACT

Decarbonizing the building sector is extremely important to mitigating climate change as the sector contributes 40% of the overall energy consumption and 36% of the total greenhouse gas emissions in the world. Net-zero energy buildings are one of the promising decarbonization attempts due to their potential of decreasing the use of energy and increasing the total share of renewable energy. To achieve a net-zero energy building, it is necessary to decrease the energy demand by applying efficiency enhancement measures and using renewable energy sources. Net-zero energy buildings can be classified into four models (Net-Zero Site Energy buildings, Net-Zero Emissions buildings, Net-Zero Source Energy buildings, and Net-Zero Cost Energy buildings). A variety of technical, financial, and environmental factors should be considered during the decision-making process of net-zero energy building development, justifying the use of multi-criteria decision analysis methods for the design of net-zero energy buildings. This paper also discussed the contributions of renewable energy generation (hydropower, wind energy, solar, heat pumps, and bioenergy) to the development of net-zero energy buildings and reviewed its role in tackling the decarbonization challenge. Cost-benefit analysis and life cycle assessment of net-zero energy building designs and their challenges were reviewed to shape the priorities of future development. It is important to develop a universal decision instrument for optimum design and operation of net-zero energy buildings.

© 2021 Elsevier B.V. All rights reserved.

## Contents

1. Introduction	2
2. Net-zero energy buildings (NZEBS)	3
2.1. Classification	3
2.2. Passive house (PH)	3
2.3. Energy efficiency (EE)	4
2.4. Active house (AH)	4
2.5. Multi-criteria analysis-based NZEB design	4
3. Renewable energy systems	4
3.1. Renewable energy supply	4
3.2. Renewable energy sources	6
3.2.1. Hydropower	6

**Abbreviations:** Symbol, Description; NZEBs, Net-Zero Energy Buildings; GHG, Greenhouse gas; MCA, Multi-criteria analysis; GSHPs, Ground source heat pumps; ASHPs, Air Source Heat Pumps; CO, Carbon monoxide; H<sub>2</sub>, Hydrogen; CO<sub>2</sub>, Carbon dioxide; CH<sub>4</sub>, Methane; N<sub>2</sub>, Nitrogen; AD, Anaerobic digestion; NPV, Net present value; CBA, Cost-benefit analysis; IRR, Internal rate of return; BCR, Benefit-cost ratio; FIT, Feed-In Tariff.

\* Corresponding author.

E-mail address: [Siming.You@glasgow.ac.uk](mailto:Siming.You@glasgow.ac.uk) (S. You).

<https://doi.org/10.1016/j.enbuild.2021.111755>

0378-7788/© 2021 Elsevier B.V. All rights reserved.

3.2.2.	Wind energy .....	6
3.2.3.	Solar energy .....	6
3.2.4.	Heat pumps .....	7
3.2.5.	Biomass .....	7
3.2.6.	Energy from solid waste .....	10
3.2.7.	Energy storage .....	10
4.	Analysis methods .....	10
4.1.	Cost-benefit analysis (CBA) .....	10
4.1.1.	Hydropower .....	11
4.1.2.	Solar thermal .....	11
4.1.3.	Wind turbines .....	11
4.1.4.	Solar (PV) .....	11
4.1.5.	Heat pumps .....	11
4.1.6.	Bioenergy technologies .....	11
4.2.	Life cycle assessment (LCA) .....	12
5.	NZEB case studies .....	13
6.	Challenges .....	14
7.	Discussion .....	14
8.	Conclusions .....	16
	CRediT authorship contribution statement .....	16
	Declaration of Competing Interest .....	16
	Acknowledgement .....	16
	References .....	16

**1. Introduction**

The building sector is currently facing great challenges concerning energy consumption, decarbonization, and a lack of access to modern energy services (i.e. energy poverty) along with the global pressure of fossil fuel depletion [1]. The sector is a major greenhouse gas (GHG) contributor and energy consumer globally. For example, in the UK, it contributed around 40% of the total carbon footprint in 2014, with 69% of these emissions being attributed to heating [2]. Buildings consume about 40% of the entire energy within the EU [3]. In China, this sector accounted for roughly 28% of the national energy consumption which was expected to increase to 35% by 2020. There is a worldwide urgency for taking stringent measures to enhance building energy efficiency and decarbonize the sector [4].

Renewable energy plays a critical role in tackling the challenges of fossil fuel depletion and climate change and has gained an increasing percentage in the energy mix around the world. For

example, approximately 30% of electricity production in the UK between April and June 2017 was provided by renewables [5]. The EU is one of the forerunners in promoting decarbonization and the use of renewable energy as reflected by its target, i.e. 20% GHG emission reduction, 20% increase of renewable energy use, and 20% upsurge in energy effectiveness by 2020 from 1990 levels [3].

The aims of decarbonization as well as increasing renewable energy generation in the building sector, stimulate the development of sustainable buildings or buildings with net-zero energy (NZEB) status. An NZEB is defined as a building or construction that has a zero-net consumption of energy or zero carbon emissions over a set period (Fig. 1) [6]. A two-way grid is a grid that can deliver energy to and receive energy from a building. The red arrow in Fig. 1 is the energy exported from the building to the grid and is used to indicate either off-site or on-site grid. The green arrow refers to the energy delivered to the building from the grid which could be either off-site or on-site renewable energy.

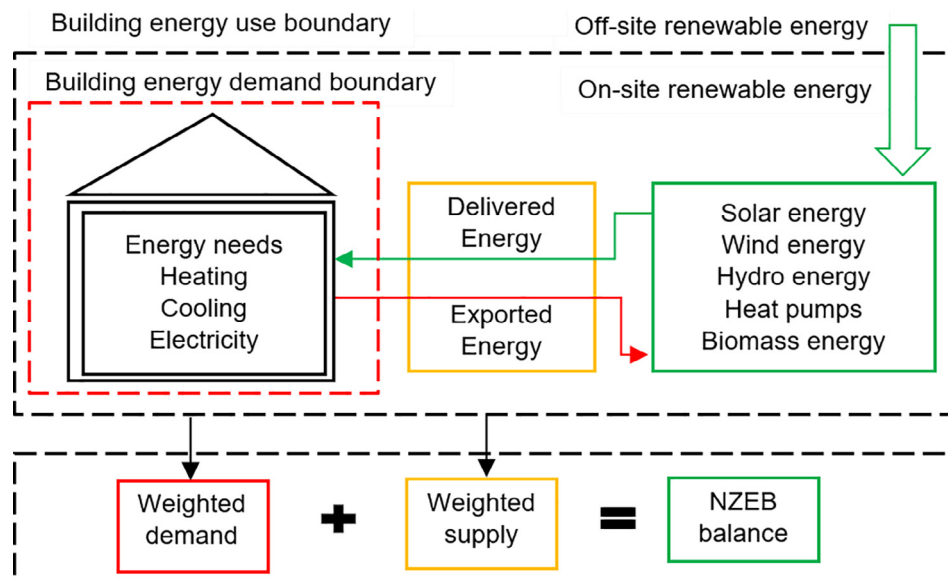


Fig. 1. The definition of NZEB.

The concept of NZEB can be used to describe a building with traits such as having equal energy generation to usage, a large reduction in energy demands, and the costs of energy being equal to zero or net-zero GHG emissions [7]. It can also refer to as a building that generates sufficient renewable energy on-site to satisfy its energy requirements [8].

There are several ways in which buildings can achieve net-zero energy, including integrated building design, retrofits, and energy conservation [9]. For example, high-quality insulation is integral in helping achieve net-zero energy by effectively reducing energy demands [10]. The use of underfloor heating in place of radiators can reduce energy consumption, as the water does not need to be heated as much to achieve thermal comfort. Finally, renewable energy (i.e. wind, solar, geothermal, and bioenergy) generation and use play a central role in fulfilling NZEBs.

Extensive studies have been carried out concerning the development of NZEBs with the different types of renewable energy. However, the practical implementation of NZEBs is still in its early stages, particularly for the ones supported by distributed renewable energy sources. There are limited reviews that summarise the development of NZEBs in terms of renewable energy generation and the methods (considering various factors such as economic viability and environmental impacts) of designing NZEBs. Harkouss and Fardoun reviewed NZEB definitions and designs and their drawbacks, and considered the most used electric and thermal renewable energy applications in supporting NZEBs [11]. Feng et al. presented features of current NZEB development, reviewed climate-responsive NZEB designs, and analyzed building energy performance and technology options [12]. It is worth noting that, in addition to the concept of NZEB, there is a concept called “net energy” frequently used to account for the balance between the energy consumed by a building and its occupants and systems, and the energy from renewable energy sources. Hernández and Kenny incorporated the “net energy” concept to aid the design of a built environment from a life cycle perspective, leading to the definition of life cycle zero energy buildings (LC-ZEB) [13].

There have been few studies reviewing the contributions of renewable energy generation to the development of NZEBs and the techno-economic feasibility and environmental impacts of renewable energy technologies in supporting NZEBs. Specifically, there are rare studies systematically summarising the potential of different types of renewable sources to support NZEBs and the methods that can be used to design NZEBs. This paper will fill these gaps by clarifying the extent to which the use of renewable energy technologies can support NZEBs and their techno-economic and environmental impacts.

The rest of this paper is organized as follows: Section 2 presents the classifications of NZEBs. Section 3 explains the supply options of renewable energy for NZEBs. Section 4 explains the methods of cost-benefit analysis and life cycle assessment that are commonly applied to evaluate the performance of renewable energy technologies and development. Section 5 reviews and provides a summary of case studies of NZEBs. Section 6 presents the challenges of NZEB development. Section 7 presents a discussion and a summary of the information for renewable energy generation towards NZEB development. Section 8 concludes the paper and provides perspectives.

## 2. Net-zero energy buildings (NZEBs)

### 2.1. Classification

NZEBs are typically classified into four well-known models based on different modes of energy generation and usage: Net-Zero Site Energy Buildings (NZ-site-EB), Net-Zero Emissions Build-

ings (NZ-EB), Net-Zero Source Energy Buildings (NZ-source-EB), and Net-Zero Cost Energy Buildings (NZ-cost-EB) [14]. An NZ-site-EB produces a unit of energy for every energy unit consumed on the site itself. The origin of the energy is not considered as it assumes that a unit of energy is equal to that of another, regardless of its source. This definition may prevent the identification of cost-saving prospects like peak and off-peak energy tariff rates [15]. An NZ-source-EB produces a unit of energy for every energy unit consumed on the site itself. The energy generation is quantified at the source [7]. This definition has an edge over the first one as it considers energy that may be lost or wasted during generation or distribution. However, it also prevents the identification of cost-saving opportunities. NZ-source-EB suggests that some energy produced can be from an off-site source. An NZ-EB defines a building that produces minimally as much emission-free energy as it consumes emission-producing energy [16]. It encourages emissions-producing energy if the same amount of energy is offset by emissions-free energy. For an NZ-cost-EB, the owner of the building has zero utility bills. However, utility providers usually charge certain fees for various reasons such as maintenance. To meet obligations for maintenance and maintain the capacity to meet potential loads, the associated costs may make NZ-cost-EB not achievable. It does not consider the energy production process and is affected by external factors such as variations in fees.

Hierarchical steps have been proposed to develop NZEBs. Firstly, energy use should be reduced by restricting the quantity of loss and heat gain, considering building service systems such as cooling and heating. Secondly, renewable energy technologies can be used to supplement energy supply and to cover part of the energy use that cannot be reduced. Typical renewable energy technologies such as solar thermal, heat pumps, bioenergy, and wind turbines can be considered [17]. It is worth noting that, upon NZEB rating, only the operational energy intended for a building is used while the energy linked to the building's construction (i.e. embodied energy) and commissioning is often ignored [18]. This is mostly due to a lack of data, a preference for traditional construction methods, and the difficulty of quantifying the energy incorporated [19].

### 2.2. Passive house (PH)

The PH standard has emerged as a key enabler for the NZEB standard. A PH is designed to have an energy demand that is as low as achievable [20]. The PH concept could minimize the energy demand of buildings by enhancing the use of the building technologies with low energy requirements [21]. It aims to deliver a satisfactory and even superior indoor environment concerning thermal comfort and indoor air quality at the lowest energy cost. The PH standard relies on a few major principles: a ventilation system that recovers heat, excellent airtightness, improved thermal insulation, and reduction of thermal bridges [22]. Consequently, when houses are built under the PH standard, the cost normally rises.

The PH concept aims to achieve clean indoor air, good thermal comfort, and a considerable decrease in the main energy demand, e.g., saving more than 50% of major energy consumption [21]. Based on the PH concept, a building should conform to certain requirements. For example, the demand for space heating energy should not exceed 15 kWh/m<sup>2</sup>. The principal energy demand, i.e. the entire energy that domestic applications consume, should not exceed 120 kWh/m<sup>2</sup>. Concerning airtightness, a maximum of 0.6 air changes per hour is allowed [23]. Comparatively, the NZEB standard demands that houses must consume on average less than 45 kWh/m<sup>2</sup> per year, including ventilation, fixed lighting, and space heating. The NZEB standard focuses solely on energy con-

sumption, while the PH standard is defined based on the consideration of the indoor environment and quality and thermal comfort.

When it comes to defining the sustainability of a building, the materials used in its construction are crucial [24]. Normally, NZEBs do not account for the embodied energy during the construction and production of the materials they use [25]. The energy embedded in the construction of a building includes the energy used in the manufacturing of the materials, their transportation, and the energy required by the machinery during the execution of relevant tasks [26]. According to Chastas et al., the share of embodied energy among the overall energy usage for passive buildings could range from 11 % to 33 % [27].

The energy analysis of buildings showed that the embodied energy could account for 50% of all primary energy demand [28]. Ding found that the energy embodied in residential structures ranged from 3.6 to 8.76 GJ/m<sup>2</sup> [29]. Dascalaki et al. measured the embodied energy for a variety of buildings which ranged from 3.2 GJ/m<sup>2</sup> to 7.1 GJ/m<sup>2</sup> on average [30]. Construction energy should be viewed as a tool that can be used to reduce the extraction and exploitation of non-renewable raw materials. Hence, it is desirable to develop a new NZEB rating approach to take into account the variation of embodied energy.

Living Building Challenge is another common approach for designing NZEBs. In this approach, the premise is evaluated based on seven Petals (performance areas) that include place, water, energy, health, materials, equity, as well as beauty. Certification of the framework looks at the actual performance and not anticipated outcomes. As a result, approaches must be operational for at least twelve months before being evaluated [31]. A living building can earn living certification by achieving all imperatives assigned to a typology (renovation or new infrastructure), and Petal certification by satisfying the requirements of at least three Petals. Zero energy certification mandates that projects fulfil 100% of their energy needs with on-site renewables [32].

### 2.3. Energy efficiency (EE)

The improvement of EE is critical for the development of NZEBs. The United Nations Development Programme (UNDP) illustrated three ways to decrease the energy consumptions of buildings: (1) Reducing energy demand, (2) Improving 'technical' energy efficiency, and (3) Integrating renewable energy sources into a building system in supporting heating, and electricity generation [33].

Effective insulation can reduce buildings' energy requirements by not only preventing the escape of heat during heating months but also stopping unwanted heat from being transferred into the building during cooling months [6]. U-Values serve as an indicator of how effective a building's material is at preventing heat loss. A case study on NZEBs in the UK found the lowest heating loads and total energy consumption were achieved when the external walls had a U-value of 0.1 [34]. Upon the application of models and concepts of energy efficiency in buildings, several factors need to be considered including renewable energy supply (e.g., wind energy and solar energy), energy demand reduction (e.g., lighting and heating, ventilation, and air conditioning), and technical energy improvement (e.g., insulation and natural ventilation).

### 2.4. Active house (AH)

AH is a goal-oriented framework for improving indoor and outdoor environments (e.g., active shading and switchable roof), as well as the efficient use of energy [35]. AH is creating new opportunities for the built environments. Responding to the issues highlighted in the UN Sustainable Development Goals, AH offers sustainable building solutions which balance energy, environment, and safety while catering to the needs of a building's users. People

are interested in sustainability while also demanding products and services that take their health and well-being into consideration [36]. AH standards have been the subject of scientific investigations, covering daylight design, the sociological perspective of indoor comfort, energy-efficient, and user-focused building design. For example, Lara Anne Hale addressed the legitimacy of comfort criteria in the building sector and among policymakers, as well as the importance of user-centric designs of technologies in smart buildings [37].

### 2.5. Multi-criteria analysis-based NZEB design

Multi-criteria analysis (MCA) is an effective solution to systematically assessing uncertainty impacts [38]. MCA housing various assessment criteria (e.g., technical, economic, environmental, and social) are tools that are commonly used for analyzing thermal comfort and energy performance when designing NZEBs [39]. It can be used to evaluate the energy performance of a particular building [40], and the thermal comfort it is offering to occupants [41]. MCA approaches help in evaluating the state of buildings and in comparing them with alternatives such as NZEBs. The comparison permits the best refurbishment approaches to be selected and the selection of the procedures that can be used to achieve NZEB requirements. It compares the general performance of different options for determining the best one by evaluating the possible advantages, costs, and hazards [42]. They help people to have a better understanding of how a particular building can operate using different designs [43].

MCA is helpful for guiding pre-design and preliminary design [44]. The pre-design stage generally involves the selection of the most efficient strategies for conserving energy, while the preliminary design is about choosing a design that is best for the building according to various critical criteria [45]. In many cases, MCA becomes essential because it determines the sustainability goals of buildings in addition to energy performance goals [46].

In Athens, a study was conducted for comparing several architectural solutions to create additional volumes in existing buildings with the consideration of NZEB standard. The maximization of comfort conditions for occupants and minimization of economic impacts were considered. The results highlighted that living space was increased by 22% with an energy-saving and polluting reduction of around 90% [47].

In the Isle of Wight, MCA was applied to determine the procedures of disposal options and wastepaper management. It has been suggested that the best options were gasification and recycling whereas the least preferred options were landfills or exporting to the mainland for incineration [48]. In Turkey, an MCA method was utilized for ranking renewable energy supply. The results showed that the priority technologies were hydropower followed by geothermal power [49]. Table 1 summarises existing studies that used MCA to design NZEBs.

## 3. Renewable energy systems

### 3.1. Renewable energy supply

Torcellini, Pless, and Deru categorized NZEBs based on the types of renewable energy supply and the configuration of renewable energy use [11]. The first category referred to an on-site supply option that tends to use renewable energy available within the building's footprint. The generated renewable energy is directly supplied to the building, which decreased distribution and transmission losses. The second category referred to an on-site supply option that aimed to make better use of renewable energy resources that are accessible at the building's site boundary. These

**Table 1**  
MCA-based NZEB designs.

References	Design option	NZEB composition	Criteria considered	Criteria values of optimal options	Major findings
[38]	Design optimization for NZEBs	Performance preference in NZEB system design	Initial cost score, thermal comfort score, and grid stress score	Sizing of the air-conditioning system	The peak cooling load uncertainty approximately follows a normal distribution. The renewable system size combination plays an important role in the grid stress
[50]	Early stages of zero-energy building	Using a simulation-based decision support tool	Usability testing	Local benchmarking, building components, comfort conditions	Aid engineers in increasing the speed and flexibility of assessing thermal comfort and energy performance in early design alternatives.
[51]	A genetic algorithm-based system sizing method	Using the users' multi-criteria performance requirements as part of the design constraints	Energy balance, thermal comfort, and grid independence	60%	The uncertainties of the NZEB models need to be described better to improve system efficiency.
[52]	Simulation-based multi-criteria optimization of NZEBs	Using building simulation, optimization process, multi-criteria decision making (MCDM), and testing the solution's robustness	Wall and roof insulation levels, window glazing type, cooling, and heating setpoints, and PV system sizing.	Annual thermal loads 6.7% for Beirut and 33.1% for Cedars	Regardless of the climate, it is essential to minimize a space's thermal load through passive strategies that are ensured by a building envelope with high thermal performance.
[53]	Multi-criteria NZEB renewable energy system design method	Using Monte Carlo simulations to determine an estimate of the annual energy balance and the grid stress that results from power mismatch	Annual energy balance reliability, the grid stress, and the initial investment	Overall performance 0.78	The multi-criterion renewable energy system design method improved the overall performance. The model is effective in optimization of the size of renewable energy systems under uncertainties.
[54]	Net Zero Energy Village	A residential multi-energy system where energy and transport are the sectors considered simultaneously	Technical, economic, and social analysis	1.0 MW photovoltaic, 5.8 MW wind	To plan energy systems, the population needs to be involved to speed up the realization of the infrastructure. A cost-effective and reliable multi-energy system can be developed for a net-zero energy village by integrating volatile energy sources.
[55]	Integrated systems	Through Monte Carlo simulation and statistical analysis (conventional separated design and integrated design)	Initial cost, grid friendliness, and indoor thermal comfort	The initial costs of the air-conditioning, PV, and wind turbine systems were reduced by 14.4%, 13.7%, and 11.8% respectively	When considering system sizing, conventional separated designs should be replaced with an integrated design approach to improve grid economic friendliness.

**Table 2**  
Supply options for renewable energy technologies with NZEBs [11].

Options	NZEB supply options	Examples
Energy efficiency improvement	Insulation, efficient equipment, daylighting.	Reduce site energy through low-energy building technology.
On-site supply	1. Renewable energy within the building footprint. 2. Renewable energy within the site.	Photovoltaic (PV) panels, wind turbines, and ground-mounted solar thermal systems.
Off-site supply	1. Renewable energy off-site produces energy on-site. 2. Purchase off-site renewable energy sources.	Waste, wood pellets, PV panels, wind turbines.

categories are related to the models of NZ-site-EB and NZ-source-EB, mentioned previously. The third category referred to an off-site supply alternative that aimed to bring off-site renewable energy resources to the site. The fourth category referred to an off-site supply option that comprised installed renewable energy sources.

An on-site supply option tends to use renewable energy available within a building's footprint. The option also serves to make better use of renewable energy resources that are available at the building's site boundary for local energy production and distribu-

tion, as opposed to centralized systems, improving reliability and reducing distribution losses [56]. An off-site supply aims to bring off-site renewable resources to a building site to produce power on-site. Table 2 below summarises the supply options of renewable energy technologies with NZEBs.

Small-scale renewable energy systems, such as solar and wind turbines have been installed in homes. There are stand-alone systems that allow customers to generate a portion of their energy needs. In a grid-connected mode, clients can either feed excess power back into the grid or store it in storage systems for later use [57]. Specifically, wind turbines are divided into two categories: small-size wind turbines and large wind turbines. Small-size wind turbines are suitable for household and small business applications with a maximum capacity of less than 100 kW, whereas large-size wind turbines are utilized for utility power generation in wind farms and are hundreds of times larger than small-size wind turbines [58].

There are three main energy system configurations including distributed energy systems, decentralized energy systems, and centralized energy systems [59]. Centralized energy systems refer to the large-scale energy generation units that deliver energy via a vast distribution network, far from the point of use. Decentralized energy systems refer to the small-scale energy generation units that are used in delivering the energy systems to the local customers. In the decentralized energy systems, the production units that are used could be stand-alone or they could also be con-

nected to other energy systems through the shared resources. The networks and shared resources are used to share the surplus energy. In the case of connections, the systems can become decentralized energy networks that can be connected to the neighborhood systems. A distributed energy system can also be perceived as a small-scale energy generation unit that is near the point of use for the producers. The production units can also be in the form of stand-alone or in some cases can be made to form a network that shares the energy surplus. In the case of a connection in the networks, the energy systems can become locally distributed energy networks linked to nearby similar networks. The integration is perceived as an important step towards developing a smart grid and a reliable communication network is required to manage and control these systems.

### 3.2. Renewable energy sources

#### 3.2.1. Hydropower

Hydropower is an important source of electrical energy around the world and generates one-fifth of global power [60]. It was estimated that hydropower provided at least 50% and 90% of national electricity for 63 and 23 countries, respectively [61]. There are two main types of hydropower turbines: reaction and impulse turbines. The level of standing water, "head" and the flow or water volume over time dictate the type of hydropower turbine used for a project. Other influential factors include the cost, turbine efficiency, and the depth of turbine installation [62].

Hydropower turbines are used to convert water pressure into mechanical shaft power which can subsequently be used to power a generator or other machinery. The power generated is determined by the pressure head and the flow rate volume. Modern hydropower turbines can convert up to 90% of energy into electricity; however, this decreases as the size of the turbine increases. The efficiency of micro-hydro systems is typically 60–80% [63].

An intake structure, a forebay, penstock, and short canal are the essential components of a hydropower plant [60]. The intake structure at the weir diverts water away from the main river's path and controls the flow of water via the intake. Water is filtered through the forebay to eliminate particulate particles before entering the turbine. In the forebay or the settling tank, the water has been sufficiently slowed to allow particle matter to settle. To safeguard the turbines from destruction, a protection trash rack is usually located close to the forebay. The top of the penstock is required to have a valve that is closable when the turbine is turned down and water emptied for proper maintenance. Water is diverted back to the river via the canal known as the spillway when the valve is closed [63].

#### 3.2.2. Wind energy

Wind turbines convert the kinetic energy of wind into electrical energy [64]. As the airflow from the wind hits the aerofoil blade section of a turbine the lift force is significantly greater than the drag force, causing the blades to turn to produce electricity [65]. The amount of power ( $P$ ) generated in Watts by a wind turbine is given by the formula:

$$P = \frac{1}{2} C_p \rho A u^3 \quad (1)$$

where  $C_p$  is the coefficient of performance,  $\rho$  is the density of air ( $\text{kg/m}^3$ ),  $A$  is the swept area of the turbine blades ( $\text{m}^2$ ) and  $u^3$  is the wind velocity ( $\text{m/s}$ ) [66]. The Betz limit (59.3%) defines the theoretical maximum amount of energy that can be extracted from the wind by turbines [67].

For a standard wind turbine, the pitch bearings connect the rotor hub and the rotor blade and allow the blades to be adjusted so that the maximum amount of energy can be extracted from the

wind [68]. Similarly, the yaw bearing is a structure that supports the process of aligning the wind turbine rotors towards the wind. Depending on the size of the turbine this can be an active or a passive system [69]. An active system makes use of a motor to turn the nacelle, whereas a passive system would see a tail fin fitted to the turbine and the nacelle would then be free to move according to the wind direction. Passive systems are generally only used on smaller wind turbines. Micro wind turbines are suitable for taller buildings [70].

The main benefit brought about by wind power is low carbon emissions and low fuel requirements [71]. According to the estimates by the Global Wind Energy Council (GWEC), wind power could account for 12% of the electricity generation worldwide by 2020, which would avoid about 10 billion tonnes of GHG emissions [72]. In the UK, wind energy is an important source of renewable energy, and 15% of electricity in the UK was generated from wind power in 2017 [73]. The total capacity of the installed utility-scale is 82 GW in America alone, meeting 6.2% of terminal demand. In Germany, wind power is an integral part of the electricity market with the installed capacity being 194.53 GW in 2016 [74]. Germany is the country with the largest installed wind power base in Europe, followed by Spain, the UK, and France. Portugal, Denmark, Poland, Turkey, and Sweden have more than 5 GW of wind installations, and in particular, Denmark has the highest (41%) share of wind energy in its electricity demand [75]. However, the biggest drawback associated with wind energy is the inconsistency of yield [76]. Moreover, a potential issue with distributed wind turbines when located near dwelling houses is shadow flickering for which rotating blades periodically cast a shadow through openings such as windows [77].

#### 3.2.3. Solar energy

Solar energy can be harnessed through either photovoltaic panels or solar thermal panels. The amount of energy produced is largely dependent on the amount of sunshine incident upon them, which varies enormously across the globe [78]. The energy density of solar radiation at the upper levels of our atmosphere is around  $1368 \text{ W/m}^2$ . The energy density at the earth's surface drops to about  $1000 \text{ W/m}^2$  for a surface perpendicular to the sun's rays at sea level on a clear day [79]. The average raw power of sunshine incident on a south-facing roof in the UK is around  $110 \text{ W/m}^2$  [80]. The Middle East is located in the so-called 'Sun-Belt' of the earth; thus, it receives numerous terawatts of power from solar radiation. The everyday average solar radiation does differ from one month to another and reaches around  $730 \text{ W/m}^2$  during March and drops to about  $302 \text{ W/m}^2$  during August [81]. PV energy in Africa is around 470 and 660 TWh [82]. The US has estimated that solar energy potential is capable enough to provide 400 ZWh/y [83].

PV panels generally consist of two thin layers of semiconductor material, such as silicon, sandwiched together. One of the layers is doped with phosphorous to give a negative electrostatic charge, while the other layer has a dopant such as boron, giving it a positive charge [84]. When light energy hits the cell, electrons are knocked loose from the negatively charged side and are captured by the positively charged side. This flow of electrons is an electric current that can be captured by metal contacts [85]. Efficiencies of PV panels have risen from around 1% conversion up to 46% in recent years [86].

Solar thermal panels differ from PVs in that they use solar energy to generate heat, rather than electricity [87]. While the energy gained in this way is of a lower grade (normally used for heating), the solar thermal panels can achieve much higher efficiency than PV panels, with efficiencies of up to 70% [88]. Solar thermal systems can be used with an immersion heater, boiler, or collector. For a typical solar thermal system used for households,

flat plate solar collectors are positioned on the roof at an optimum angle for gathering the most amount of solar energy [33]. The water inside the panels is combined with an antifreeze solution to prevent damage from occurring in colder months. The antifreeze solution is heated in the solar collectors and then passed through a heat exchanger to heat the water for the house; the antifreeze solution is kept in a storage tank with an auxiliary heater in case the water temperature is too low [89].

Solar panels are more effective in space cooling when integrated with a thermal-driven air-conditioner. Owing to the availability of a substantial amount of solar energy and lengthy daily sunlight hours, solar-powered cooling systems like thermoelectric cooling systems are considered an intriguing green cooling technology in the Middle East region [90]. The thermoelectric effect, in which refrigeration turns electrical energy generated by photovoltaic cells directly into a temperature gradient, is incorporated in these systems [91]. A PV system can power thermoelectric cooling systems directly without the use of an alternating current/direct current inverter, thus lowering expenses significantly. Working fluids are not used in thermoelectric cooling systems because there are no mechanical moving parts. Furthermore, these systems are eco-friendly and their GWPs were reported to range from 0.13 to 0.47  $\text{gCO}_2\text{-eq/Wh}$  [90,92]. Therefore, the combined technologies (e.g., thermoelectric cooling systems and PV) are beneficial for solar energy use and environmental protection, facilitating the fulfillment of the requirements of NZEBs.

### 3.2.4. Heat pumps

**3.2.4.1. Ground source heat pumps (GSHPs).** GSHPs serve as a source of thermal energy that can replace a traditional gas boiler [93]. GSHPs make use of the relatively constant temperature of soils, rocks, and water below the surface of the earth to heat spaces and provide hot water for buildings [94]. This is achieved by placing heat-collecting pipes containing water and a small amount of antifreeze (refrigerant solution) in a borehole or shallow trench to extract heat from the borehole. Electrical energy is required to power the pump; however, a typical GSHP will return around three or four times more thermal energy than the electrical energy it consumes [95].

The input electrical energy drives a compression/expansion cycle that acts on the refrigerant solution. This cycle extracts heat energy from a low-temperature, high-volume body of water and transfers it to a much smaller volume of water at a higher temperature, which can then be used for heating, such as a refrigerator [96]. Just as a water pump can transfer water from a low elevation to a high elevation, a heat pump can transfer heat from a low-temperature surrounding to a high-temperature surrounding. If a renewable source of electricity is used to power the pump, the system becomes even more environmentally friendly [97]. In Finland, the use of GSHPs for heating in single-family houses is growing and accounts for 38% of the heat supply (25% of homes are supplied by direct electric heating) [98]. One of the authors' previous studies found that 3382 units of 22.5 kW GSHPs were needed for supporting renewable energy development in Glasgow by 2020 [99].

**3.2.4.2. Air source heat pumps (ASHPs).** ASHPs use heat from the air outside to heat underfloor heating systems, radiators, and water in buildings [100]. The benefits of ASHPs include delivering heat at lower temperature over extended periods, increasing the overall heating efficiency (especially when combined with other renewable technologies), and eliminating fuel bills in NZEBs when the electricity required for an ASHP is powered by another renewable technology [101].

Two kinds of ASHP systems are available: air-to-air and air-to-water [102]. An air-to-water system dispenses heat through a central wet heating system [103]. Heat pumps perform much better at

a lower temperature condition compared to a standard boiler system. They are more appropriate for underfloor heating systems or bigger radiators and can give out heat at lower temperature (e.g., 20 °C) for a long time. Air-to-water heat pumps can be more suitable for recently constructed buildings [104]. It could be less costly if the heat pump is incorporated as part of the original building process, instead of having to retrofit underfloor heating afterward. Air-to-air systems, in contrast, generate warm air that is circulated by fans to heat a house. Such a system cannot generate hot water. An ASHP system can reduce carbon footprint since it utilizes a renewable, natural source of heat – air [105]. ASHPs are easy to install and do not need constant maintenance, and they can deliver both hot water and heating. However, they can have much higher emissions than GSHPs and cannot function very well in cold climate zones because of the problem of frost. Also, ASHPs commonly experience the problem of coolant leakage [106].

Heat pumps are receiving increasing attention because of their high performance in terms of efficiency. Many studies confirm that, despite different climatic conditions, heat pumps are among the most cost-effective and energy-efficient systems for NZEBs [107]. For instance, in Switzerland, more than 90% of buildings are equipped with heat pumps [108]. In Italy, Germany, France, and Denmark, heat pumps are preferable when it comes to meeting NZEB requirements under minimum future building regulations [109].

### 3.2.5. Biomass

Bioenergy makes up approximately 9% of the total primary energy supply in the world [110]. In the UK, the electricity generated from bioenergy in 2019 was 8.8 TWh, accounting for 25% of the total consumption of renewable energy [111]. In Denmark and Finland, bioenergy represents more than 15% of electricity production, while for countries like Sweden, Austria, Estonia, Belgium, Italy, and Brazil, biomass-based electricity represents around 6 to 8% of total electricity production [112]. By 2018, the global biofuel capacity was 130 GW, with the EU, China, the US, India, and Japan using 42 GW, 17.8 GW, 16.2 GW, 10.2 GW, and 4.0 GW, respectively [113].

Since NZEBs must have a reliable source of energy to achieve a stable energy supply, biomass tends to be one of the most appropriate renewables as it is not affected by climate conditions the way that wind or solar energy is, and a steady supply can normally be maintained as long as there is enough feedstock sustaining the system [114]. Also, biomass systems have a simple design and are easier to construct compared to the structures required e.g., for geothermal systems [115].

Presently, bioenergy contributes to a sustainable carbon zero society in line with cultural and economic developments [116]. Energy-efficient green buildings, such as NZEBs, reap more rewards from bioenergy than they do from other sources of renewable energy [117]. Economically, biomass, as a clean source of energy, attracts various tax benefits from the government. A study by D'Agostino and Mazzarella claimed that, among all the NZEB alternative sources of energy, biomass is most effective regarding energy supply [118].

Bioenergy can be derived from a variety of feedstocks including residues of food and paper, agricultural by-products, sewage sludge, and woody biomass [119]. The process of the whole bioenergy production process can be broken down into the steps of feedstock cultivation or collection, transportation, pretreatment and processing for energy recovery, and the distribution of the energy to the intended point of use [120].

The production cost of bioenergy can be significantly reduced if the feedstock is co-fired with pulverized coal. The gaseous biofuels (e.g., biomethane) derived from biomass can replace natural gas used for heating households. The electric power generated from

biomass can also be used as a source of power and heat in the buildings [121]. There are two main routes for biomass conversion, either biochemical or thermochemical. The thermochemical route mainly encompasses four processes: pyrolysis, gasification, liquefaction, and combustion while the biochemical route encompasses two main processes: anaerobic digestion and fermentation [122].

**3.2.5.1. Pyrolysis.** Pyrolysis involves heating biomass in the absence of oxygen [123]. During the process, the chemical compounds thermally disintegrate into charcoal (or biochar), liquid bio-oil and a combustible gas product [124]. The respective quantities of these products depend on various factors such as process parameters (e.g., temperature and heating rate) and the composition of biomass [125]. It was shown that the yield of bio-oil was optimized when the pyrolysis temperature is approximately 500 °C and the heating rate is high, at around 1000 °C/s. Under such conditions, the yield of bio-oil can be as high as 60–70 wt%, with 15–25 wt% yields of biochar and 10–15 wt% of syngas. The operation of a pyrolysis system can be sustained by consuming part of the products to provide sufficient energy to keep the process going [126].

**3.2.5.2. Gasification.** Gasification, the process that can recover a synthesis gas (i.e. syngas mainly consisting of hydrogen, carbon monoxide, and methane) from biomass, is accomplished by burning biomass at high temperatures of 700 °C with a limited oxygen supply [127]. Table 3 displays the compositions of the gas product from gasification processes of different reactor designs [128].

The following are the key stages that happen inside a biomass gasifier [45]:

1. **Drying:** Biomass typically consists of 10–35% moisture which is realised during the drying the stage.
2. **Pyrolysis:** As the heating continues after drying, biomass is decomposed into a solid product (char) and volatiles matters which undergo further reactions in subsequent stages. Tar is mainly formed during the stage and is a major problem against the reliable operation of gasification system.
3. **Oxidation:** Oxygen (e.g., air, pure oxygen, and steam) is added into the gasifier and biomass is partially combusted to generate heat and such gas products as CO and CO<sub>2</sub>.
4. **Reduction:** Typically under 800 - 1000 °C, char reacts with various gas components (e.g., H<sub>2</sub>O, CO<sub>2</sub>, and H<sub>2</sub>) to produce a mixture of combustible gas (CO, H<sub>2</sub>, CH<sub>4</sub>, and light hydrocarbons). Typical reactions include the Boudourard reaction, water gas reaction, water-gas shift reaction, etc.

**3.2.5.3. Liquefaction.** Liquefaction, which is also known as hydrothermal liquefaction of biomass, is defined as the thermochemical process that converts biomass into liquid fuel under a condition of high temperature and pressure (523–647 K and 4–22 MPa) in a water environment [129]. The temperature condition is adequate to initiate pyrolysis of biopolymers, and the pressure condition leads to maintaining a liquid water processing phase.

**Table 3**

Gas product compositions of different gasification processes (based on reactor design; air being the gasifying agent to supply oxygen to the processes) [128].

Gases (%)	Gasifier types		
	Fluidized Bed	Updraft	Downdraft
Carbon monoxide (CO)	14	24	48
Hydrogen (H <sub>2</sub> )	9	11	32
Carbon dioxide (CO <sub>2</sub> )	20	9	15
Methane (CH <sub>4</sub> )	7	3	2
Nitrogen (N <sub>2</sub> )	50.0	53.0	3.0

The duration of the process has to be long enough to allow solid biopolymeric structures to break down into liquid components [130]. The basic reaction mechanisms include [131]: depolymerization of biomass, decomposition of biomass monomers, and recombination of reactive fragments. Since liquefaction is essentially pyrolysis in hot water, the resulting main product is a liquid biocrude. Up to 70% of the carbon in the raw biomass is transformed into biocrude, and some lighter products are attained depending on which catalysts are employed [132].

**3.2.5.4. Combustion.** Direct combustion is the most well-known and most used technology for deriving energy from biomass [133]. In this process, biomass is burnt in extra air to generate heat [134]. There are three main stages involved in the combustion process [135]:

- (1) **Drying:** Similar to gasification, moisture is removed before combustion occurs. The heat required for drying is provided by radiation emitting from both flames and the heat stored in a combustion unit of the process.
- (2) **Pyrolysis:** Under a temperature condition between 200 °C and 350 °C, the volatile matters are freed and high molecular weight compounds like tar become liquid upon cooling. The heat coming from the subsequent oxidation stage is utilized to sustain the process for discharging the more volatile matters.
- (3) **Oxidation:** Oxygen is required both at the fire bed for carbon oxidation and above the fire bed to react with CO to form CO<sub>2</sub>, which is discharged to the atmosphere. A longer biomass residence time in the combustor allows it to be fully consumed. It is pertinent to point out that all the stages mentioned above can take place at the same time within a fire. It is vital to work towards 100% complete combustion of fuel to prevent wastage and improve the cost efficiency of the combustion process [136].

**3.2.5.5. Anaerobic digestion (AD).** AD is the process whereby organic waste, such as food waste and animal food, is disintegrated to generate biogas that can be combusted for energy recovery and digestate that can be used as a bio-fertilizer. This process takes place when there is no oxygen in a sealed container [137].

The generated biogas can be used to produce heat, electricity, or as a substitute for natural gas after upgrading [138]. The process is carried out inside enclosed vessels (digesters), whose internal temperatures are maintained between 30 and 55 °C [139]. The process takes place in three stages, which are liquefaction or hydrolysis, acetogenesis, and methanogenesis. In the liquefaction stage, fermentative bacteria convert complex and insoluble organic matter into monomers. In industrial operations, chemical reagents are used during liquefaction to produce high-quality methane with a shorter digestion time. During the second stage of AD, products of the first stage are converted to simple organic hydrogen acids and carbon dioxide through the action of acetogenic bacteria such as lactobacillus. During the third stage, methane is produced by the action of methanogens such as methane bacillus [140].

**3.2.5.6. Fermentation.** Fermentation is an anaerobic biochemical process that breaks down organic compounds (e.g., glucose) into value-added products such as ethanol and hydrogen. In a fermentation process, biomass is inoculated with yeast or bacteria, which act on the sugars and yield ethanol and carbon dioxide. To achieve the high product purity required for fuel applications, ethanol can be distilled and dehydrated. The solid residue leftover from the fermentation process can be used as a cattle feed to achieve additional environmental benefits. In the case of sugar, the resultant



**Table 4**  
Renewable energy usage for NZEB development.

Reference	NZEB design	Renewable sources	Critical parameters	Major findings
[147]	On-site or off-site renewable energy supply NZEB	Photovoltaic, micro combined heat and power (CHP), off-site windmill, purchase of green energy from the 100% renewable utility grid	Energy efficiency	Energy efficiency should be the priority to design a cost-optimal NZEB with an on-site renewable energy supply. It is more cost-effective to invest in renewable energy technologies than energy efficiency.
[148]	Renewable energy balance in environmental building design	All possible renewable sources	Maximizing the use of renewable resources	Renewable energy balance can be used in environmental building designs to achieve higher levels of sustainability.
[149]	Solar energy for NZEBs	Solar thermal and PV	The total efficiency of the power source and the usage of space	Using high-efficiency PV modules in construction helps to achieve an almost zero energy balance depending on the boundary conditions as well as the building's energy system design.
[150]	A classification system based on renewable energy supply options	Renewable sources on-site, off-site	Energy efficiency	A classification system can be developed to distinguish NZEBs based on the source of renewable energy as well as the building's utilization.
[151]	Net-zero energy (NZE) low-rise residential building	Solar energy	Energy performances	The building orientation has little influence on the energy performance of the systems year-round. The NZEB design can potentially be utilized in all new and old buildings to ensure low carbon production.
[152]	The impact of photovoltaic and solar thermal on net NZEBs	Solar energy	Percentage of energy provision	Solar energy can provide more than 76% of the energy demands in NZEBs.
[53]	Multi-criterion NZEB renewable energy system	Conventional renewable energy sources	Annual energy balance reliability, the grid stress, and the initial investment	NZEB's renewable energy proposal enhances the overall performance by 44% when compared with conventional methods.
[153]	Building-integrated solar renewable energy systems for zero energy buildings	Solar energy	Energy saving	To meet thermal needs in buildings, using renewable energy with energy-saving measures like installing good insulation will be efficient.

**Table 5**  
Waste characteristics (UK) [161].

Composition	wt %	Moisture %	Carbon %	Hydrogen %	Oxygen %	Higher heating value kJ/kg
Paper and card	15.9	6.25	45.94	6.35	38.55	17,445
Plastic film	4.5	11.31	44.77	6.08	32.45	33,727
Dense plastic	9.2	7.5	73.81	11.90	4.83	33,727
Textiles	4.3	7.04	47.64	6.30	35.46	8000
Combustibles	13.1	15.88	45.35	5.51	32.45	19,771
Glass	5.5	2.25	0.50	0.10	0.40	151.19
Food/kitchen waste	3.3	66.38	44.77	6.08	32.45	19,771
Garden waste	31.5	55.16	43.62	5.55	33.92	16,282
Other organics	2.6	66.38	44.77	6.08	32.45	19,771
Metal	1.1	5.50	4.50	0.60	4.30	1954
Hazardous items	4.1	13.00	0.50	0.10	0.40	12,000
Electrical items	0.9	14.11	0.50	0.10	0.40	-
Fines	1.5	14.49	26.30	3.00	2.00	-
Non-combustibles	2.6	0.50	0.50	1.00	4.00	-

fiber known as bagasse can be used as a fuel in boilers or for further gasification [141].

Fermentation-based hydrogen production can be divided into three categories: (i) dark-fermentation, in which no light is used; (ii) photo-fermentation, in which light is used as an energy source; and (iii) a combination of photo- and dark-fermentation [142]. When dealing with fermentation-based hydrogen production, numerous factors should be examined including the types of feedstocks, microorganisms, and technologies (i.e. dark-fermentation, photo-fermentation, and photo- and dark-fermentation) [143]. Refined sugars, raw biomass sources like corn stover, and even wastewater can be used as the organic matter for the process. Dark fermentation is a cost-effective and environmentally beneficial method of processing waste biomass. For example, dark fermentation, with a net energy ratio of 1.9, was thought to be the most promising and well-understood technique of biohydrogen production from biomass [144]. Many anaerobic microbes use hydrogen as a primary energy source. If energy-rich hydrogen molecules

are available, such microbes can use the electrons produced by hydrogen oxidation to generate energy. In the absence of external electron acceptors, organisms generate an excess of electrons in metabolic activities as a result of protons being reduced to hydrogen molecules. Hydrogenases are the key enzymes that regulate hydrogen metabolism [145]. To improve the performance of dark fermentation (e.g., the yield of hydrogen), different types of bacteria such as *Bacillus amyloliquefaciens* and *Clostridium pasteurianum* have been tested and sophisticated co-culture fermentation techniques were also proposed [146].

Table 4 shows the existing studies that used the different types of renewable energy for the development of NZEBs. Because different renewable energy sources can be used to facilitate NZEB design models, critical parameters such as the location of the building, energy efficiency, and performance should be considered when designing the models and selecting the suitable renewable source of energy.

**Table 6**  
Advantages and disadvantages of biomass [164,165].

Advantages	Disadvantages
Biomass is a renewable energy source.	Fuel uses may compete with edible biomass production.
Non-edible biomass can be used.	There is a lack of global control over the production of biofuels and the certification of their origins.
Climate change benefits from carbon neutral conversion.	Biomass has a high moisture content.
Biomass contains less ash and S, and most trace elements than fossil fuels.	Biomass has a low energy density.
The supply for producing biofuels, sorbents, fertilizers, and other materials is abundant.	Some technical problems occur during thermochemical processing, such as slagging and corrosion.
Biomass consumption helps to reduce biomass residues and waste.	The investment cost is high.
Ash aids in capturing and storing toxic components.	Biofuels often need to be combined with small amounts of fossil fuels to make them more effective.
Biomass costs are lower than fossil fuels.	
Biomass can be converted into many fuel chemicals.	

### 3.2.6. Energy from solid waste

Bioenergy-based NZEBs have the additional benefit of facilitating the development of sustainable waste management practices. The waste being sent to landfills has been a significant environmental concern in recent years [154]. The EU has set a target to restrict the amount of landfilled biodegradable municipal waste to 35% of the 1995 baseline level by 2020 [155]. Generating bioenergy from waste through the technologies mentioned above is a promising solution for tackling the challenges of sustainable waste management and renewable energy production [127]. A study conducted by the Sustainable Development Commission Scotland found that 3.9% of Scotland's total heat demand could be provided through the energy from waste [156]. Up to 300 kg of CO<sub>2</sub> could be saved for every tonne of solid waste that is treated [157]. This is because when waste biomass is treated, biogenic carbon can be excluded. A recent study showed that by selling the by-products (e.g., biochar and digestate), waste-treatment systems that generate bioenergy had a 68% to 98% chance of profitability and the bioenergy systems were able to meet 20–23% of electricity demands and 4–5% of heat demands of local communities in Glasgow [158].

Using municipal solid wastes as the main source of renewable technology for NZEBs would enhance the sustainability of the system at a community level [159]. In particular, dwellers would be able to participate in providing sources for the system, and the energy suppliers would, in turn, supply renewable energy to sustain the buildings [160]. The amount of waste and its composition are vital factors for estimating energy potential. Municipal solid waste is broadly classified into organic and inorganic compounds. The major chemical compositions of some typical wastes in the UK are listed in Table 5. Biomass generates around ten times less CO<sub>2</sub> per MWh when compared to traditional fuels [162]. However, the utilization of biomass in urban areas might contribute to a city's fine-particle pollution [163]. The main advantages and disadvantages of biomass versus fossil fuels are summarised in Table 6.

### 3.2.7. Energy storage

Energy storage can always be essential when handling self-consumption and excess energy can be stored and used when there is a deficiency. Energy storage can be used in the generation of income by leveraging changes in energy prices; power is purchased during times of low demand and price and exported to the grid when the energy demand and market price are high [166].

When there is extra renewable generation, energy can be stored in the form of heat, potential energy, chemical energy, etc., and discharged when renewable generation is deficient. To accommodate demands, short-term, seasonal storage might be used. Building owners must evaluate whether the benefits of a storage system outweigh the higher initial cost and complexity of the system [167]. NZEBs can use a variety of energy storage methods. Specifically, excess power can be stored in batteries and transformed into thermal energy, or chemical energy [168]. Heat can be stored directly as thermal energy, turned into electricity and stored in batteries, or converted into chemical energy [169].

Battery energy storage systems have been widely regarded as one of the most viable solutions, with many advantages such as rapid reaction, long-term power delivery, and less dependence on the grid [170]. In particular, battery storage can store and release energy at high frequencies, and offer frequency and voltage stability, making it an efficient tool for improving renewable energy system management. However, one of the most significant challenges when implementing battery energy storage systems is the determination of the optimal battery size for managing the trade-off between their technological advantages and the extra cost. Concerning the optimization of battery energy storage systems, a variety of performance indicators including financial, technical, and hybrid factors need to be considered (e.g., smaller systems are desired from a financial perspective) [171].

The electricity from renewable sources could also be buffered using vehicle-to-home systems. By charging during off-peak hours and discharging during peak hours, electric vehicles can modify or regulate the peak power profiles and load of buildings [172]. Hydrogen fuel cell vehicles with the benefit of zero pollutant emissions have also been demonstrated as a media of fuel storage for residential buildings [173].

Partial off-grid energy storage is valuable for load shifting and improved usage of on-site renewable generation, but it does not necessitate the large investment required for a fully off-grid NZEB. The energy storage arrangement and associated energy conversion equipment increase the complexity of NZEB design and planning, incurring additional expense. Off-grid NZEBs, on the other hand, could be a feasible choice for isolated regions without grid connections. Off-grid, self-sustained NZEBs require large energy storage systems [170].

## 4. Analysis methods

### 4.1. Cost-benefit analysis (CBA)

CBA aims to supply decision-makers with a framework that can be used to assess the economic attractiveness of a renewable development. Typical economic indicators of CBA include the benefit-cost ratio (BCR), net present value (NPV), cash flow balance, and internal rate of return (IRR) [174]. As an example, the NPV marks the dissimilarity between the current value of cash inflows and the value of cash outflows considered over some time as shown below:

$$NPV = \sum_t \frac{C_t}{(1+r)^t} - C_0 \quad (3)$$

where  $C_t$  is the net cash flow during the period  $t$ ,  $C_0$  is the total investment cost,  $T$  is the lifetime of the project under study, and  $r$  is the discount rate. The discount rate ranges from 5 to 10% depending on the ratio of equity financing and financing for projects.

It is noted that as the number of years ( $t$ ) progresses, the effect of discount rate diminishes. This means that the further away the cost or benefit is set in the future, the lower its discount factor becomes. A higher discount rate for renewable energy resources

only means more preference for things now rather than in the future [175]. The discount rate is applied to the cash flows to account for the time value of money, due to factors such as inflation and interest rates. A positive NPV indicates that by constructing an NZEB the owner will have saved money over keeping with conventional means. The IRR is corresponding to the discount rate that causes a zero NPV.

The renewable technologies described above each have different capital, maintenance, and material costs, and may correspond to different feed-in tariffs (FiTs). The FiT is a government program that promotes low-carbon electricity generation technologies and tends to make the uptake of small-scale renewable technologies more attractive [176].

#### 4.1.1. Hydropower

Hydropower has been used for decades and is one of the most efficient and reliable renewable energy sources. Low-head micro-hydropower plants are a viable and cost-effective option to generate electricity in rural, isolated, and hilly areas [63]. The efficiency of a Turgo turbine can reach 91% at 3.5 m head and 87% at 1.0 m head [177]. The efficiency of a Pelton turbine is 70–90%. Because of the uneven flow in the spinning buckets, the performance of a Pelton turbine is dynamic [178].

Another important turbine, crossflow turbine can be used in both horizontal and vertical layouts. Unlike the Pelton and Turgo turbines, the cross-flow turbine is typically employed at higher flow rates and lower heads [179]. For small and micro-power outputs, crossflow turbines have an average efficiency of around 80% but can achieve as high as 86% for medium and large outputs. It was reported that micro-hydropower had an initial cost of nearly 6 cents per hour [180]. In the socio-economic development of isolated hills and mountain locations, micro-hydro power is a cost-effective option.

The cost of building a hydropower plant can be divided into four categories which are civil work, which was estimated to account for about 40% of the total cost, turbine and generator sets (30%), control equipment (22%), and management costs (8%) [181]. The overall cost per kilowatt of power capacity ranges from \$1500 to \$2500 [182].

#### 4.1.2. Solar thermal

Solar thermal panels capture energy from the sun to heat water, and the heated water is stored in an insulated cylinder [183]. Solar thermal combines well with other renewable technologies to achieve a high efficiency, and the system can last approximately 25 years [184]. The cost of solar thermal system obtained by scaling up costs per m<sup>2</sup> is £700 (USD 944) [185,186]. The generation tariff is 20.66p/kWh (USD 0.028/kWh) for the UK [187], making it of the highest thermal tariff. In Portugal, solar thermal collectors were designed to cover around 60% of domestic hot water (DHW) needs. Solar thermal systems should be replaced after 14 years [188].

#### 4.1.3. Wind turbines

Domestic wind turbines have a typical lifetime of 25 years and require regular maintenance and checks [189]. Parts such as the inverter will need replacement at some regular frequency, which costs approximately £1500 (USD 2023) over the lifetime of the project [190]. A 2.1 kW rated wind turbine cost is approximately £4500 (USD 6071) [191], and there is presently a generation tariff of 8.24p/kWh (USD 0.11/kWh) in the UK [192]. The corresponding fixed O&M cost is £22.5/kWh/year (USD 30.4/kWh/year) [193]. The level of profitability of wind turbines is dependent on the average wind speed.

**Table 7**

The cost breakdown of gasification plus combined heat and power generation (2 MWe) [214].

Items	k€
Capital costs	
Consultancy/design	650.4
Civil works	1409.3
Fuel handling/preparation	617.7
Electrical/balance of plant	433.6
Converter system (gasifier)	6753.8
Prime mover (CHP)	2732.7
Annual operating costs	
Personnel	120
Power consumption	91.8
Inertization system	26.5
Water treatment	182
Waste disposal	171.5
Consumables	35
Maintenance	629.9
Unit of hourly cost	232.0

#### 4.1.4. Solar (PV)

The worldwide solar PV capacity increased from 0.7 GW in 1996 to 139 GW in 2013 [194]. Solar PV turns solar energy into electricity with a lifetime of around 25 years [195]. It was demonstrated that the PV technology decreased the consumption of non-renewable main energy to a level below the approximate zero-energy threshold value, which is expected to be 15 kWh/(m<sup>2</sup>·y) [196]. At present, based on electricity charges and solar PV system capabilities and production levels, the costs for single-family houses, apartment buildings, and other building types are 0.044 €/kWh (USD 0.050/kWh), 0.037 €/kWh (USD 0.042/kWh), and 0.024 €/kWh (USD 0.027/kWh), respectively [197].

#### 4.1.5. Heat pumps

Heat pumps could be both cost-effective and energy-efficient [198]. They can play a significant role in high-performance buildings planned to meet future NZEB requirements, not only owing to the energy and cost factors but also due to demand response capabilities to support operation of connected energy grids. [107].

It was shown that heat pumps combined with PV are the most cost-effective systems for single-family buildings based on a 25-year life-cycle analysis of energy efficiency and annual cost [199]. Most NZEB projects opt for a GSHP as the core device of an HVAC system owing to its excellent performance. GSHPs can provide a higher energy efficiency (30%) than ASHPs [200]. But in certain areas where the air is not very cold in winter but is very hot in summer, an ASHP might be more sensible, particularly for small scale applications [201].

GSHPs can last 25 years with regular maintenance. The capital cost of a GSHP (4 kW) is approximately £14,000 (USD 18,891) [202]. ASHPs generally last for 15 years, and the capital cost for an ASHP (10 kW) system is approximately £6000 (USD 8097) [203]. In the UK, the revenue of GSHPs is 9.36p/kWh (USD 0.13/kWh), the cost of installation is £1000/kW (USD 1349/kW), and the O&M cost is £5/kW (USD 6.8/kW) [99].

#### 4.1.6. Bioenergy technologies

In the UK, the average capital costs of gasification (2 MW) are £16,708 million (USD 22,643 million). The O&M costs for gasification plants in the UK are around 17% of the capital cost [204]. The average O&M cost of gasification is £2860 million (USD 3857 million), and the average O&M cost of AD is £ 11,329 million (USD 15,287 million). In Europe, the investment costs of waste incineration plants are £18–140 million (USD 24–188 million) for a scale of 50–400 kt/a [205]. In the UK, the investment cost for pyrolysis

**Table 8**  
Economic performance (cost and payback period) of different renewable energy systems [216–223].

No.	Renewable energy generation type	The average cost		The average payback periods (Year)
		(£/kw)	(USD/kw)	
1	Hydropower	1,800–2,000	2,428–2,699	4–7
2	Heat pumps	6000–14,000	8,095–18,888	5–15
3	Wind turbine	4,500–6,000	6,071–8,095	13–19
4	Solar	3,000–5,000	4,047–6,745	7–10
5	Biomass	7,500–9,000	10,118–12,142	12–13

plants ranged from £11–130 million (USD 14–175 million) [206]. In Finland, the Lahti plant is a 250 kt/a power plant based on gasification with an entire investment cost of roughly £160 million (USD 216 million) [207]. In the UK, the capital cost of a 5000 kW gasification-based CHP system has a capital cost of £201 million (USD 271 million) in 2015 [208]. AD plants in the UK with a power ranking of up to 100 kW have a unit cost of £7500/kW (USD 10,119/kW) [209]. Anticipated revenues in waste-to-energy processes are mainly electricity and heat sales, and the sale of recovered materials. In Europe, a major waste incineration plant charges a fee of approximately 100 £/t (USD 135/t), compared with £50–77/t (USD 67–104/t) in the UK [206]. In Italy, the revenue from digestate sales amounted to £15/t (USD 20/t) [209]. In Australia in 2015, the average biochar price was about £674/t (USD 909/t) [210]. A recent study showed that when the sale of the by-products were considered, the profits of waste-to-bioenergy development could increase by 68–98%. [158].

Biomass boilers can last 20 years, leading to major savings in CO<sub>2</sub> emissions throughout the lifetime of a boiler [211]. Pellet costs are approximately £255/t (USD 344/t) across the UK, but this depends on the size of an order and method of delivery [122]. The estimated capital cost of a biomass boiler is £4218 (USD 5690), and the generation tariff is 6.74 p/kWh (USD 0.09/kWh) in the UK [212]. In Austria, the price of pellets was €232/t (USD 262/t) in 2016, while in France, due to an increase in the VAT rate on pellets from 5.5% to 10%, the cost was €272/t (USD 308/t) [213]. Table 7 shows the cost components for a gasification system with CHP generation.

To consider the effect of inflation, the following equation can be used [214]:

$$C = C_0 \times \left(\frac{P}{P_0}\right) \tag{4}$$

where C is the current cost, C<sub>0</sub> is the original value referred to its reference year, P/P<sub>0</sub> is the fraction of producer price indices calculated based on the actual inflation rate. To consider the potential effect of scale, the following equation has been used:

$$C = C_0 \times \left(\frac{S}{S_0}\right)^f \tag{5}$$

where C is the scaled cost referred to the commercial-scale S and C<sub>0</sub> is the reference cost referred to the reference scale S<sub>0</sub>.

**Table 9**  
The carbon emissions of the different types of energy sources [249].

Renewable energy sources	Emissions (gCO <sub>2</sub> /kWh)
Wind	4–24
Biomass	14 – 650
Waste-to-energy	97–1000
Hydropower	2–75
Geothermal	11–78
Solar PV	9–300
GSHPs	65–189
ASHPs	138–276

It's critical to compare on-site and off-site renewable energy supplies upon the design of NZEBs. Marszal et al. used CBA to ascertain the optimal levels of energy efficiency and renewable energy generation, including on-site (photovoltaic – micro CHP) and off-site (windmill and purchase from a 100% renewable energy electrical grid) choices [215]. The findings revealed that for designing a cost-effective NZEB with on-site generation, energy efficiency should be prioritised over renewable power. Meanwhile, it is more cost-effective to invest in renewable energy systems rather than energy efficiency for off-site choices. Table 8 compares the overall costs and payback periods of typical renewable energy systems.

#### 4.2. Life cycle assessment (LCA)

LCA involves the analysis and assessment of the environmental effects of a specified product or service throughout its whole lifecycle based on the energy and material inputs and the emissions released into the environment [223]. It is an iterative process that comprises the following stages: (1) the definition of the goal and scope, (2) life cycle inventory, (3) life cycle impact assessment, and (4) the interpretation of LCA results [224].

In stage (1), goal definition includes information such as the planned use of the study, the reasons for conducting the study, and the targeted audience. Defining the scope involves providing information such as the system boundary, functional unit, data sources, data requirements, and suppositions used. In stage (2), data is gathered for each unit process incorporated within the system. The data can be calculated or estimated and are used to measure the inputs and outputs of unit processes involved. In stage (3), the potential environmental impacts are evaluated in terms of some specific impact categories (e.g., global warming potential, acidification potential, etc.). This is done to highlight the significance of all environmental loads collected in stage (2) by analyzing their effects on defined environmental impacts. In the final stage, the aim is to examine the appropriateness of the findings based on the checking of the scope and goals and to draw conclusions from all the information gathered.

It was shown that biomass produced approximately ten times less CO<sub>2</sub> per MWh compared to conventional fuels and was almost on par with other renewable sources such as wind [225]. Matthews and Mortimer stated that the approximate life cycle CO<sub>2</sub> emissions for wood pellets is 7 kg/GJ. Their definition of life cycle covers the entire process of utilizing wood pellets, beginning from the original resource to its final disposal. Using this value, the total amount of CO<sub>2</sub> that would be released per annum for a domestic building was estimated to be 608 kg [226]. Kang, Sim, and Kim carried out experiments on wood pellets and discovered that after gasification, the mass of the biomass reduced by 37% from a starting mass of 0.8065 g [227]. Table 9 summarises the emission levels of sources of energy.

Table 10 shows the life cycle assessment of NZEBs. NZEB designs that have high thermal insulation and airtightness normally have low levels of embodied energy and reduced environmental impacts. Appliances and office equipment contribute to

**Table 10**  
LCA of NZEBs.

Reference	NZEB design	Functional unit	Global warming potential impact ratio	Major influential factors	Findings
[228]	NZE in poultry housing	Cradle-to-farm gate environment	34%	Most emissions and embodied energy were associated with the construction of the housing and renewable energy generation systems	Based on the life cycle impacts, NZE poultry housing with solar PVs could generate net environmental benefits in most impact categories in provinces with greener electricity grid mixes.
[229]	The convergence of life cycle assessment and nearly zero-energy buildings	German thermal insulation ordinance	–	Raw materials for construction	The reduction of energy consumption had progressed in building construction.
[230]	Energy life-cycle approach to NZEB balance	Operation and embodied energy	–	–	Adopting the life cycle perspective and the concept of embodied energy transformed the NZEB targets. The demand for primary energy increased twice when compared to demand in conventional primary energy cases.
[231]	Environmental impacts of appliances in NZEBs	Furniture and appliances	Appliances: 30%, non-renewable energy: 15%	Office appliances and computer equipment make up 30% of greenhouse gas emissions	Appliances contribute to global warming potential. Labels describing the energy efficiency of appliances should include the life cycle perspective and the user's point of view.
[232]	Nearly zero-energy multifamily buildings	Building materials and energy production devices	Building structures: 50%, system: 12%	The pre-use phase of the building contributed 56% of the environmental impacts and the operation energy contributed 31%	The consumption of operative energy affected only one-third of the buildings' environmental impacts.
[233]	Materials life cycle assessment	Meet living building criteria	10%	The largest environmental impacts are the building materials, structural steel, and photovoltaic panels	The environmental impacts associated with the use phase were very low relative to building materials.
[234]	Integrated assessment framework	Integration of LCA and multi-criteria analysis	31%	Environment, human health, and energy efficiency	The approach could be used for entire buildings or components and assemblies in buildings.

global warming as does building construction, depending on the type of material used.

## 5. NZEB case studies

Currently, the concept of NZEBs is still relatively new, and there are limited cases of practical applications in Europe [235]. In a detailed report on 32 NZEBs in the European region, four buildings had service systems powered by biomass boilers, and a total of six buildings used direct biomass heating [236]. For example, a building in Belgium used a biomass boiler together with photovoltaic panels, solar thermal panels, and a gas boiler. The energy use of the building showed a 78% improvement compared to national requirements. Another building in Ireland used biomass heating with a combined heat and power system based on natural gas and photovoltaic electricity production. The energy use of the building showed a 50% improvement compared to national requirements. However, one must also consider the costs involved in using bioenergy. The initial investment cost of a building complying with the current legislation was 6% higher than a reference building that used biomass heating in Belgium. Also, the NPV over 30 years was €7100 (USD 8036) less than the reference building [237].

In Cyprus, the first regulation concerning the energy performance of buildings was presented in 2007, and the Energy Performance Certification for buildings was advanced in 2010 [235]. The regulations and legislation for NZEBs in Cyprus are heading in the right direction. One potential limitation is that there are no guidelines regarding thermal comfort within a building. Also, there are no strict calculation methodologies applied to normal buildings or NZEBs for construction engineers to use for reference [236]. The NZEB design is also challenged by humidity and condensation,

thermal insulation methods, mould growth, air-tightness issues, and the question of how to use renewables in combined systems that focus on incorporating renewable energy, distributed generation, such as solar and wind in a single hybrid system [235].

In Greece, NZEB adaptation is in its infancy. More studies and information are needed to define the minimum energy efficiency threshold for NZEBs about either primary energy or end-uses. There is limited understanding about the bounds of CO<sub>2</sub> emissions for NZEBs. Solar energy is most commonly utilized and is regarded as the most effective renewable energy system. The chief obstacle for more widespread use in urban areas is the cost and the inadequate space allowed for solar access [238].

In Portugal, sustainable engineering is part of the energy revolution that applies the principles of NZEBs. The country regards NZEB principles in its architectural drive to comply with the implementation requirements of the European directive of 2010/2013 [188]. Despite achieving milestones in the creation of energy-efficient homes, some obstacles still hinder the move towards NZEBs. Some of these obstacles include financial and legal constraints [239]. For NZEBs in Portugal, the cost-optimal solution is to make use of green energy that is generated and used on-site or nearby to ensure the fulfillment of significant extra energy use [240]. There is a gap in the law and the requirements regarding upgrades or the redesigns of energy systems in existing houses or architectural designs. It is also impractical in Portuguese cities to optimize solar orientation, the layout of internal spaces, and the window to floor area ratio in ways that make NZEBs most effective and efficient. The consequence of such obstacles is that they limit the scope of passive building design elements [241].

In Romania, there are no guidelines for specifying the cooling, heating, or total energy demand for a building to be considered as an NZEB [242]. The supply chain is also split between the market

**Table 11**  
Summary of NZEB status in Europe [235].

Regions	Status	Opportunities	Challenges
Europe	Large-scale deployment of NZEB.	The EU can benefit from future innovation and grow the market in NZEB.	Requiring a large turnover of existing buildings.
Belgium	Belgium was set a definition for NZEB in 2009.	Biomass boilers together with photovoltaic panels can be used for NZEB.	The high costs involved in using bioenergy should be considered. The diffusion of NZEBs is complex due to regulatory, economic, social, and technological barriers.
Ireland	New labels regarding positive energy building and low carbon are set up.	Biomass can be a dominant renewable energy source for residential NZEBs.	Bioenergy must be combined with other renewable energy systems, like PV to generate electricity.
Cyprus	National Plan is in place. Definition of NZEB has been set for the design of NZEB.	The regulations and legislation for NZEBs are heading in the right direction	No guidelines regarding thermal comfort within a building. No strict calculation methodologies were applied to NZEBs for construction engineers to use for reference.
Greece	No National Plans are yet available.	Solar energy is most utilized and is regarded as the most effective renewable energy source.	The cost and limited space available for solar access.
Portugal	Definition of NZEB depends on numerous variables including technical viability, climate, type of construction, traditions, etc.	Energy revolution applied in the creation of energy-efficient homes.	Financial and legal constraints as well as limited professional support.
Romania	National Plan is under development.	The high availability of renewable energy.	No guidelines are specified for cooling, heating, or total energy demand for a building to be considered as an NZEB.
Spain	A draft of NZEB indicators for Spain was published in 2016.	The design of buildings complying with the basic criteria and the current regulatory framework is meet the requirements of NZEB.	Large socio-economic obstacles restrict the process of renovation in the housing sector, no building code for future building energy indicators.

for products and construction materials and marked by limited product performance, making it difficult for engineers to choose appropriate NZEB components. A method to standardize product quality is required to overcome certain monopolistic practices

and allow easy access to good quality products at reasonable prices [235].

In Spain, every building that can satisfy the least requirements of the present technical building code will be regarded as an NZEB

**Table 12**  
List of barriers in the decision-making of new construction and retrofitting processes [247].

Field	Barriers in decision making	Retrofitting processes	New construction
Technical	The building's structure and design limit the choice of technical solutions and NZEB-related renovation. There is no one-size-fits-all solution since every building is different. Solutions have to be highly customized. Personnel with a high level of knowledge are required to carry out NZEB renovations. An NZEB needs to ensure the security of renewable energy supply in different weather conditions throughout the year.	The existing building's structure and design limit the choice of technical solutions and NZEB-related renovation. There are insufficient proven and cost-efficient solutions for NZEB renovation.	There is a disparity between the different energy needs, due to the challenges created by climate change, dense urbanization, noise pollution, air pollution, and population aging. Fulfilling NZEB requires changing the rules of the building's design.
Financial	Investment costs can be high. The payback period is long and may require long-term ownership of the building, which is not always possible. Greater financial incentives are needed for higher energy-efficiency goals. It is critical to figure out the optimal renewable energies and efficiency improvements to minimize capital costs and maximize income.	Building owners are probably unable to make money from investments in NZEBs. It is difficult to ensure that the project is financially justifiable without public funding.	Unawareness among investors and citizens about the multiple benefits and feasibility of NZEBs (energy costs over the lifetime) Financial incentives are needed for renewable energies to support NZEB.
Social	Residents and owners lack the knowledge or interest needed to improve energy efficiency. Architectural and cultural values restrict the extent of NZEB renovations that can be done.	There is a need to communicate and provide information early in the renovation stage to increase acceptance among residents. Architectural and cultural values restrict the extent of NZEB renovations that can be done.	More attempts are needed to raise awareness about energy-neutral buildings and to discuss the strategic approach of enterprises to develop a suitable conceptual model for NZEBs.
Organizational	If the building is owned by several parties, all or the majority of the stakeholders have to agree before renovations can begin.	Planning and preparation are needed to reduce the impact of the renovation process on the building's occupants. Communication should take place between all involved parties early in the process.	Need new building design concepts that respect climate sensitivity and technological state. Need to harmonize actions between countries and consider the knowledge transfer between countries to accelerate the implementation of NZEB.
Environmental Health Policy	It is necessary to ensure that NZEB designs are in line with government regulations to receive generation and export tariffs.	If the residents stay in the building during renovation, issues such as noise and dust need to be taken into consideration. There is a risk of increased moisture when making a building more airtight.	Making energy neutrality of buildings desirable, and to use it as a self-esteem and social status perspective. Legislation is subject to extreme uncertainty.

[243]. However, the latest Spanish technical building code is not yet available, and, at present, only a draft of the future building energy indicators exists [244]. One major challenge of NZEB operation in Spain is the huge variation in climate zones. This necessitates several indicators that are flexible enough to evaluate the different approaches for achieving NZEB status. The obstacles to NZEB application comprise the slow process of providing a definition and a potentially problematic economic market situation. Concerning energy-saving building renovation, large socio-economic obstacles restrict the process of key renovations in the housing sector [235].

Because of the numerous technology possibilities, it is critical to choose an “optimal” configuration to maximize the overall economic and environmental benefits. It is also important to accommodate local climates and other circumstances in the optimisation for greater design flexibility. As shown above, although several countries have made headway to establishing national standards, the effort to incorporate the concept of NZEBs into international standards and national codes needs to be strengthened. How to incorporate the idea of NZEB into building processes and routines, particularly for renovated buildings, is still an open question. Table 11 summarises the NZEB development and challenges in Europe.

## 6. Challenges

NZEB development faces a variety of challenges during the decision-making process [235]. One of the major challenges stems from the limited tools for guiding the decision-making process regarding different aspects of NZEB development such as technical, policy, and financial [235]. For example, an NZEB needs to meet yearly energy consumption with a renewable energy system that guarantees stable supply in different weather conditions [245]. Financially, it is critical to determine the optimal renewable energies and efficiency improvements to minimize capital costs and maximize income. Policy-wise, it is necessary to ensure that NZEB designs are consistent with government regulations to receive export and generation tariffs [7]. Detailed information is summarised in Table 12.

These challenges occur at the different stages throughout a project life cycle and have to be considered to ensure the long-term success of an NZEB design. For example, Marszal and Heidelberg selected a multi-story residential property in Denmark as a case study to identify the necessary lifetime analysis involved in an NZEB design. They explored the issues from the building owner's perspective, which generated valuable information for prospective homeowners looking to invest in an NZEB [246]. Their results have shown that investment in energy efficiency was made more cost-effective by reducing the energy used to deliver the NZEB design.

## 7. Discussion

This section summarises the development of main renewable energy technologies for NZEBs, focusing on renewable energy supply, energy storage, CBA, and LCA to help define the priorities of future development. Solar energy has long been the most popular renewable energy source for NZEBs, owing to its widespread availability, and its relatively low cost which is generally unaffected by the installation size. When there is limited installation space for solar energy, a wind turbine can be used to augment the solar energy or lessen the dependence on a single energy source. Wind energy is often less accessible and feasible compared to solar energy, although it has the advantage of more availability during cloudy days and nights. However, the deployment of wind energy for NZEBs is limited by its relatively high cost. Biomass energy is

relatively weather-independent, which makes it appealing, especially when biomass sources such as locally generated waste, are easily accessible. CHP generation can be exploited to achieve higher process efficiencies. ASHPs are appealing for home applications because of their simple setups, and low maintenance and expense. High-efficiency, low-temperature ASHPs must be designed to work in very cold climates to compete with fossil fuel systems. GSHP systems are also appropriate for residential NZEBs, particularly in colder locations, due to their higher efficiency. However, GSHP systems are expensive which continues to be a significant barrier to their widespread adoption.

It is worth noting that the weather has an impact on the applicability of various energy-saving strategies. For example, in heating-dominated buildings, higher insulation and airtightness usually result in greater savings. For cooling-dominated structures, the aforementioned factors are less efficient, and the insulation may instead hinder the natural cooling effect during extended periods of lower outdoor temperature [248].

Smart controls, energy-efficient lighting, and energy-efficient appliances, among other things, all contribute to NZEBs by lowering building energy consumption. Energy-efficient lights and appliances can reduce the cooling load on HVAC systems. Smart controls can facilitate the development of a net-zero building if residents have relatively energy-efficient behaviours.

Energy storage can be used to boost process performance while also lowering resource costs and minimizing environmental impacts if properly designed and configured. The fundamental components of energy storage include energy generation, storage, and supply. NZEBs become more complex with energy storage systems and the accompanying energy conversion equipment, which also incur additional expenditure in the form of initial investment and O&M. On the other hand, off-site NZEBs can be a good choice for isolated regions without grid connections, though they may necessitate large energy storage systems.

The cost and benefit components of renewable generation vary significantly. In the UK, the estimated capital cost of a biomass boiler is £4218 (USD 5690), and the generation tariff is 6.74 p/kWh (USD 0.09/kWh). The estimated cost of a solar thermal system is £700 (USD 944), with a generation tariff of 20.66 p/kWh (USD 0.027/kWh). A 2.1 kW rated wind turbine costs £4500 (USD 6070), and there is a generation tariff of 8.24 p/kWh (USD 0.11/kWh). The capital costs for an ASHP system are approximately £6000 (USD 8094). The cost of a GSHP is approximately £14,000 (USD 18,887). Their capital costs for an ASHP are much cheaper than a GSHP, which has the highest implementation and maintenance costs, therefore, is one of the least attractive renewable technologies. Hence, country- or even city-specific CBA may be needed to specify the economic attractiveness of different renewable generation methods towards NZEB development.

It is important to evaluate the roles of renewable energy generation in NZEB-based decarbonisation efforts using LCA. Relevant LCA frameworks and database need to be in place to optimize the selection of renewable energy generation towards NZEB development considering the varied carbon saving potentials of the renewable energy technologies and the different configurations/routes of a single renewable technologies (e.g., bioenergy can be generated using gasification, anaerobic digestion, pyrolysis, etc.).

## 8. Conclusions

This paper has presented an inclusive review covering the crucial issues related to NZEBs, the contributions of renewable energy generation to the development of NZEBs, the role of NZEBs in tackling the issues of reducing CO<sub>2</sub> emissions and saving energy. NZEBs reduce energy use through two strategies: diminishing the need

for energy use in buildings via the use of energy-efficient measures and embracing renewable energy technologies to meet the remaining energy needs.

Although no single “best” configuration can be suggested, the goal of this review is to highlight potential design methods and renewable energy options for NZEB development. Different NZEB configurations are available for varied climate and building codes, and building industry practitioners need to choose the technologies and architectural components that conform to local conditions and limitations. It is essential to develop a universal decision instrument that directs the management and design of NZEBs. Future research should also focus on how to better integrate renewable energy generation technologies into the designing and analysis of NZEBs. For example, upon the use of waste-to-energy technologies to support the development of NZEBs, its ability for facilitating sustainable waste management can be considered as an additional benefit. The use of waste in the generation of energy minimizes the environmental impact of uncontrolled disposal, and the decomposition of organic wastes often encourages environmental sustainability.

### CRedit authorship contribution statement

**Asam Ahmed:** Conceptualization, Data curation, Formal analysis, Funding acquisition, Investigation, Methodology, Project administration, Validation, Writing – original draft. **Tianshu Ge:** Writing – review & editing. **Jinqing Peng:** Writing – review & editing. **Wei-Cheng Yan:** Investigation, Writing – review & editing. **Boon Tuan Tee:** Writing – review & editing. **Siming You:** Supervision, Conceptualization, Data curation, Formal analysis, Funding acquisition, Investigation, Methodology, Project administration, Validation, Writing – review & editing.

### Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper

### Acknowledgement

Mr. Asam Ahmed and Dr. Siming You would like to thank the funding support from the Libyan Ministry of Higher Education and Scientific Research.

### References

- [1] M. Santamouris, Innovating to zero the building sector in Europe: Minimising the energy consumption, eradication of the energy poverty and mitigating the local climate change, *Solar Energy* 128 (2016) 61–94.
- [2] UK Green Building Council. Climate change. 2018 2018 – 12 – 01; Available from: <https://www.ukgbc.org/climate-change/>.
- [3] Dechezleprêtre, Antoine, Daniel Nachtigall, and Frank Venmans. “The joint impact of the European Union emissions trading system on carbon emissions and economic performance.” (2018).
- [4] Z. Liu et al., Application and suitability analysis of the key technologies in nearly zero energy buildings in China, *Renewable and Sustainable Energy Reviews* 101 (2019) 329–345.
- [5] D. Greenwood et al., Integration of High Penetrations of Intermittent Renewable Generation in Future Electricity Networks Using Storage, in: *Future Energy*, Elsevier, 2020, pp. 649–668.
- [6] I. Sartori, A. Napolitano, K. Voss, Net zero energy buildings: A consistent definition framework, *Energy and buildings* 48 (2012) 220–232.
- [7] L. Wells, B. Rismanchi, L. Aye, A review of Net Zero Energy Buildings with reflections on the Australian context, *Energy and Buildings* 158 (2018) 616–628.
- [8] K. Peterson et al., A common definition for zero energy buildings. Prepared for the US Department of Energy by The National Institute of Building Sciences, US Department of, Energy (2015).
- [9] Y. Lu, S. Wang, K. Shan, Design optimization and optimal control of grid-connected and standalone nearly/net zero energy buildings, *Applied Energy* 155 (2015) 463–477.
- [10] M. Hu, Does zero energy building cost more?—An empirical comparison of the construction costs for zero energy education building in United States, *Sustainable cities and society* 45 (2019) 324–334.
- [11] F. Harkouss, F. Fardoun, P.H. Biwole, Optimization approaches and climates investigations in NZEB—A review, *Building Simulation*, Springer, 2018.
- [12] W. Feng et al., A review of net zero energy buildings in hot and humid climates: Experience learned from 34 case study buildings, *Renewable and Sustainable Energy Reviews* 114 (2019) 109303.
- [13] P. Hernandez, P. Kenny, From net energy to zero energy buildings: Defining life cycle zero energy buildings (LC-ZEB), *Energy and Buildings* 42 (6) (2010) 815–821.
- [14] J. Laustsen, Energy efficiency requirements in building codes, energy efficiency policies for new buildings, IEA Information Paper. (2008).
- [15] M. Kapsalaki, V. Leal, Recent progress on net zero energy buildings, *Advances in Building Energy Research* 5 (1) (2011) 129–162.
- [16] S. Pye et al., Achieving net-zero emissions through the reframing of UK national targets in the post-Paris Agreement era, *Nature Energy* 2 (3) (2017) 1–7.
- [17] B. Berggren, M. Hall, M. Wall, LCE analysis of buildings—Taking the step towards Net Zero Energy Buildings, *Energy and Buildings* 62 (2013) 381–391.
- [18] H. Nydahl et al., Environmental performance measures to assess building refurbishment from a life cycle perspective, *Energies* 12 (2) (2019) 299.
- [19] L. Qarout. Reducing the environmental impacts of building materials: Embodied energy analysis of a high-performance building. 2017, The University of Wisconsin-Milwaukee.
- [20] E.K. Zavadskas et al., Achieving Nearly Zero-Energy Buildings by applying multi-attribute assessment, *Energy and Buildings* 143 (2017) 162–172.
- [21] W. Feist et al., Re-inventing air heating: Convenient and comfortable within the frame of the Passive House concept, *Energy and buildings* 37 (11) (2005) 1186–1203.
- [22] A. Dodoo, L. Gustavsson, R. Sathre, Life cycle primary energy implication of retrofitting a wood-framed apartment building to passive house standard, *Resources, Conservation and Recycling* 54 (12) (2010) 1152–1160.
- [23] W. Feist, et al., Passive house planning package 2007. Specifications for Quality Approved Passive Houses, Technical Information PHI-2007/1 (E), Darmstadt, Passivhaus Institut (December 2007).
- [24] R. Singh, I.J. Lazarus, Energy-efficient building construction and embodied energy, in: *Sustainability through energy-efficient buildings*, CRC Press, 2018, pp. 89–107.
- [25] E. Bontempi, A new approach for evaluating the sustainability of raw materials substitution based on embodied energy and the CO2 footprint, *Journal of Cleaner Production* 162 (2017) 162–169.
- [26] M.K. Dixit, Life cycle recurrent embodied energy calculation of buildings: A review, *Journal of Cleaner Production* 209 (2019) 731–754.
- [27] P. Chastas, T. Theodosiou, D. Bikas, Embodied energy in residential buildings—towards the nearly zero energy building: A literature review, *Building and environment* 105 (2016) 267–282.
- [28] R. Giordano et al., Embodied energy versus operational energy in a nearly zero energy building case study, *Energy Procedia* 111 (2017) 367–376.
- [29] G.K.C. Ding, The development of a multi-criteria approach for the measurement of sustainable performance for built projects and facilities (2004).
- [30] E. Dascalaki et al., On the share of embodied energy in the lifetime energy use of typical Hellenic residential buildings, *IOP Conference Series: Earth and Environmental Science*, IOP Publishing, 2020.
- [31] S. Shtargot, Living building challenge: Enhancing the local environment. *ReNew: Technology for a Sustainable*, *Future* 143 (2018) 24–25.
- [32] Tabrizi, A. Sustainable Construction, LEED as a Green Rating System and the Importance of Moving to NZEB. in *E3S Web of Conferences*. 2021. EDP Sciences.
- [33] J. Pérez et al., Improving Energy Efficiency in a Municipal Building: Case Study of Ekurhuleni Metropolitan Municipality Buildings in South Africa, in: *The Role of Energy in Energy and the Environment*, Springer, 2018, pp. 769–779.
- [34] A. Peacock, M. Newborough, The 40% house project, Task two: technical potential (2004).
- [35] M. Calbureanu, R. Malciu, D.M. Calbureanu, Active House—A Building that Offers more than Consumes, *Advanced Engineering Forum*, *Trans Tech Publ*, 2018.
- [36] Feifer, L., et al., Active house: Smart nearly zero energy buildings. 2018: Springer.
- [37] L.A. Hale, At home with sustainability: from green default rules to sustainable consumption, *Sustainability* 10 (1) (2018) 249.
- [38] Y. Sun, P. Huang, G. Huang, A multi-criteria system design optimization for net zero energy buildings under uncertainties, *Energy and Buildings* 97 (2015) 196–204.
- [39] Y. Ding et al., Uncertainty sources and calculation approaches for building energy simulation models, *Energy Procedia* 78 (2015) 2566–2571.
- [40] Pinheiro, S., et al. Model view definition for advanced building energy performance simulation. in *CESBP/BauSIM 2016 Conference*, Dresden, Berlin. 2016.
- [41] V. Monetti et al., Calibration of building energy simulation models based on optimization: a case study, *Energy Procedia* 78 (2015) 2971–2976.
- [42] Dodgson, J.S., et al., Multi-criteria analysis: a manual. 2009.



- [43] M. Saffari et al., Passive cooling of buildings with phase change materials using whole-building energy simulation tools: A review, *Renewable and Sustainable Energy Reviews* 80 (2017) 1239–1255.
- [44] C. Bhowmik, S. Bhowmik, A. Ray, The effect of normalization tools on green energy sources selection using multi-criteria decision-making approach: A case study in India, *Journal of Renewable and Sustainable Energy* 10 (6) (2018) 065901.
- [45] F. Garde et al., Design of net zero energy buildings: feedback from international projects, *Energy Procedia* 61 (2014) 995–998.
- [46] J. Mourmouris, C. Potolias, A multi-criteria methodology for energy planning and developing renewable energy sources at a regional level: A case study Thassos, Greece, *Energy Policy* 52 (2013) 522–530.
- [47] M.-N. Assimakopoulos et al., Holistic approach for energy retrofit with volumetric add-ons toward nZEB target: Case study of a dormitory in Athens, *Energy and Buildings* 207 (2020) 109630.
- [48] D. Hanan, S. Burnley, D. Cooke, A multi-criteria decision analysis assessment of waste paper management options, *Waste management* 33 (3) (2013) 566–573.
- [49] Ü. Sengül et al., Fuzzy TOPSIS method for ranking renewable energy supply systems in Turkey, *Renewable Energy* 75 (2015) 617–625.
- [50] S. Attia et al., Simulation-based decision support tool for early stages of zero-energy building design, *Energy and buildings* 49 (2012) 2–15.
- [51] Z.J. Yu et al., A GA-based system sizing method for net-zero energy buildings considering multi-criteria performance requirements under parameter uncertainties, *Energy and Buildings* 129 (2016) 524–534.
- [52] F. Harkouss, F. Fardoun, P.H. Biwole, Multi-objective optimization methodology for net zero energy buildings, *Journal of Building Engineering* 16 (2018) 57–71.
- [53] S. Zhang, P. Huang, Y. Sun, A multi-criterion renewable energy system design optimization for net zero energy buildings under uncertainties, *Energy* 94 (2016) 654–665.
- [54] P. Lombardi et al., Multi-criteria planning tool for a net zero energy village, *IEEE*, 2018.
- [55] L. Shen, Y. Sun, Performance comparisons of two system sizing approaches for net zero energy building clusters under uncertainties, *Energy and Buildings* 127 (2016) 10–21.
- [56] N. Phuangpornpitak, S. Tia, Opportunities and challenges of integrating renewable energy in smart grid system, *Energy Procedia* 34 (2013) 282–290.
- [57] M.A. Ahmed, Y.C. Kang, Y.-C. Kim, Communication network architectures for smart-house with renewable energy resources, *energies* 8 (8) (2015) 8716–8735.
- [58] M.A. Ahmed, Y.-C. Kim, Communication networks of domestic small-scale renewable energy systems, *IEEE*, 2013.
- [59] C. Vezzoli et al., Distributed/decentralised renewable energy systems, in: *Designing Sustainable Energy for All*, Springer, 2018, pp. 23–39.
- [60] D.K. Okot, Review of small hydropower technology, *Renewable and Sustainable Energy Reviews* 26 (2013) 515–520.
- [61] O. Yuksek et al., The role of hydropower in meeting Turkey's electric energy demand, *Energy policy* 34 (17) (2006) 3093–3103.
- [62] Davis, S. and S. Diegel, US Department of Energy, *Energy Efficiency and Renewable Energy. Transportation Energy Data Book, Edition, 2007*, 26.
- [63] O. Paish, Small hydro power: technology and current status, *Renewable and sustainable energy reviews* 6 (6) (2002) 537–556.
- [64] A.W. Manyonge et al., Mathematical modelling of wind turbine in a wind energy conversion system: Power coefficient analysis, *Applied mathematical sciences* 6 (91) (2012) 4527–4536.
- [65] R. Tamašauskas et al., Investigation and Evaluation of Primary Energy from Wind Turbines for a Nearly Zero Energy Building (nZEB), *Energies* 12 (11) (2019) 2145.
- [66] V. Calderaro et al., A fuzzy controller for maximum energy extraction from variable speed wind power generation systems, *Electric Power Systems Research* 78 (6) (2008) 1109–1118.
- [67] Buildings, N.Z.C., A framework definition. UK Green Building Council, April, 2019.
- [68] M. Stammler et al., Friction torque of wind-turbine pitch bearings—comparison of experimental results with available models, *Wind Energy Science* 3 (1) (2018) 97–105.
- [69] M. Palraj, P. Rajamanickam, Motion control of a barge for offshore wind turbine (OWT) using gyro stabilizer, *Ocean Engineering* 209 (2020) 107500.
- [70] A. Bahaj, L. Myers, P. James, Urban energy generation: Influence of micro-wind turbine output on electricity consumption in buildings, *Energy and buildings* 39 (2) (2007) 154–165.
- [71] Parkinson, S., D. Wang, and N. Djilali. Toward low carbon energy systems: The convergence of wind power, demand response, and the electricity grid, in *IEEE PES Innovative Smart Grid Technologies*, 2012. IEEE.
- [72] Oral, A.Y. and Z.B.B. Oral, 3rd International Congress on Energy Efficiency and Energy Related Materials (ENEFM2015), 2015.
- [73] F. Salata et al., Heading towards the nZEB through CHP+ HP systems. A comparison between retrofit solutions able to increase the energy performance for the heating and domestic hot water production in residential buildings, *Energy conversion and management* 138 (2017) 61–76.
- [74] Y. Liu et al., Research on the Current Situation of Renewable Energy Exploitation in Typical Countries in the World, IOP Conference Series: Earth and Environmental Science, IOP Publishing, 2018.
- [75] I. Komusanac, D. Fraile, G. Brindley, Wind energy in Europe in 2018-Trends and statistics. Wind, Europe (2019).
- [76] J. Bukala et al., Investigation of parameters influencing the efficiency of small wind turbines, *Journal of Wind Engineering and Industrial Aerodynamics* 146 (2015) 29–38.
- [77] E. Peri, N. Becker, A. Tal, What really undermines public acceptance of wind turbines? A choice experiment analysis in Israel, *Land Use Policy* 99 (2020) 105113.
- [78] M. Bakker et al., Performance and costs of a roof-sized PV/thermal array combined with a ground coupled heat pump, *Solar energy* 78 (2) (2005) 331–339.
- [79] FRS, D.J.M. and D. MacKay, *Solar energy in the context of energy use, energy transportation, and energy storage*. 2013.
- [80] D.J. MacKay, Solar energy in the context of energy use, energy transportation and energy storage, *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences* 371 (2013).
- [81] F. Trieb, H. Müller-Steinhagen, J. Kern, Financing concentrating solar power in the Middle East and North Africa—Subsidy or investment?, *Energy Policy* 39 (1) (2011) 307–317.
- [82] S. Hermann, A. Miketa, N. Fichaux, Estimating the renewable energy potential in Africa. IRENA-KTH Working Paper, International Renewable Energy Agency, Abu Dhabi, Émirats Arabes Unis (2014).
- [83] E. Kabir et al., Solar energy: Potential and future prospects, *Renewable and Sustainable Energy Reviews* 82 (2018) 894–900.
- [84] A.M. Bagher, M.M.A. Vahid, M. Mohsen, Types of solar cells and application, *American Journal of optics and Photonics* 3 (5) (2015) 94.
- [85] D. D'Agostino, Assessment of the progress towards the establishment of definitions of Nearly Zero Energy Buildings (nZEBs) in European Member States, *J. Build. Eng* 1 (2015) 20–32.
- [86] D. D'Agostino, P. Zangheri, Development of the NZEBs Concept in Member States. Towards Nearly Zero Energy Buildings, Europe (2016).
- [87] S.A. Kalogirou, Solar thermal collectors and applications, *Progress in energy and combustion science* 30 (3) (2004) 231–295.
- [88] K. Voss, E. Musall, M. Lichtmeß, From Low-Energy to Net Zero-Energy Buildings: Status and Perspectives, *Journal of Green, Building* 6 (1) (2011) 46–57.
- [89] K. Patel, P. Patel, J. Patel, Review of solar water heating systems, *International Journal of Advanced Engineering Technology* 3 (4) (2012) 146–149.
- [90] M.A. Elmaaref et al., Solar thermoelectric cooling technology 2015 Aswan, Egypt
- [91] K. Ullah et al., A review of solar thermal refrigeration and cooling methods, *Renewable and Sustainable Energy Reviews* 24 (2013) 499–513.
- [92] A. Żelazna, J. Gołębiewska, A PV-Powered TE Cooling System with Heat Recovery: Energy Balance and Environmental Impact Indicators, *Energies* 13 (7) (2020) 1701.
- [93] M. Yu et al., Techno-economic analysis of air source heat pump combined with latent thermal energy storage applied for space heating in China, *Applied Thermal Engineering* 185 (2021) 116434.
- [94] N. Zhu et al., Recent research and applications of ground source heat pump integrated with thermal energy storage systems: A review, *Applied thermal engineering* 71 (1) (2014) 142–151.
- [95] X. Cao, X. Dai, J. Liu, Building energy-consumption status worldwide and the state-of-the-art technologies for zero-energy buildings during the past decade, *Energy and buildings* 128 (2016) 198–213.
- [96] A.S. Gaur, D.Z. Fitiwi, J. Curtis, Heat pumps and our low-carbon future: A comprehensive review, *Energy Research & Social Science* 71 (2021) 101764.
- [97] I. Sarbu, C. Sebarchievici, General review of ground-source heat pump systems for heating and cooling of buildings, *Energy and buildings* 70 (2014) 441–454.
- [98] A. Mohamed, A. Hasan, K. Sirén, Fulfillment of net-zero energy building (NZEB) with four metrics in a single family house with different heating alternatives, *Applied Energy* 114 (2014) 385–399.
- [99] A. Ahmed, S.W. Sutrisno, S. You, A two-stage multi-criteria analysis method for planning renewable energy use and carbon saving, *Energy* (2020) 117475.
- [100] N.J. Hewitt et al., Advanced air source heat pumps for UK and European domestic buildings, *Applied Thermal Engineering* 31 (17–18) (2011) 3713–3719.
- [101] M. Ó'Riain, J. Harrison, Cost-optimal passive versus active nZEB. How cost-optimal calculations for retrofit may change nZEB best practice in Ireland, *Architectural Science Review* 59 (5) (2016) 358–369.
- [102] G.A. Mouzeviris, K.T. Papakostas, Comparative analysis of air-to-water and ground source heat pumps performances, *International Journal of Sustainable Energy* 40 (1) (2021) 69–84.
- [103] U. Çakır et al., An experimental exergetic comparison of four different heat pump systems working at same conditions: As air to air, air to water, water to water and water to air, *Energy* 58 (2013) 210–219.
- [104] J. Brenn, P. Soltic, C. Bach, Comparison of natural gas driven heat pumps and electrically driven heat pumps with conventional systems for building heating purposes, *Energy and Buildings* 42 (6) (2010) 904–908.
- [105] N. Zhao, F. You, Can renewable generation, energy storage and energy efficient technologies enable carbon neutral energy transition?, *Applied Energy* 279 (2020) 115889
- [106] M.K. Mattinen et al., Energy Use and Greenhouse Gas Emissions of Air-Source Heat Pump and Innovative Ground-Source Air Heat Pump in a Cold Climate, *Journal of Industrial Ecology* 19 (1) (2015) 61–70.
- [107] C. Wemhoener, R. Schwarz, L. Rominger, IEA HPT Annex 49—Design and integration of heat pumps in nZEB, *Energy Procedia* 122 (2017) 661–666.

- [108] Wemhoener, C., S. Buesser, and L. Rominger. Design and integration of heat pumps for nZEB in IEA HPT Annex 49. in E3S Web of Conferences. 2019. EDP Sciences.
- [109] Bryant, S., L. Bergmanna, and S. Ashurst. The impact of EU nearly-zero energy building (NZEB) regulations on heating and heat pump choices in buildings. 2017.
- [110] J. Wang et al., Sustainability assessment of bioenergy from a global perspective: A review, *Sustainability* 10 (8) (2018) 2739.
- [111] Littlechild, S. and K. Vaidya, *Energy Strategies for the UK*. 2019: Routledge.
- [112] Bacovsky, D., et al., IEA Bioenergy Countries' Report: Bioenergy policies and status of implementation. 2016, Bioenergy 2020+ GmbH, Graz (Austria).
- [113] Raturi, A.K., *Renewables 2016 global status report*. 2016.
- [114] K. Severnyák, Contradictions of low-emission nZEB buildings, IOP Conference Series: Earth and Environmental Science, IOP Publishing, 2019.
- [115] S. Medved, S. Domjan, C. Arkar, Best Available Technologies (BAT) for On-Site and Near-by Generation of Heat for NZEB, in: Sustainable Technologies for Nearly Zero Energy Buildings, Springer, 2019, pp. 131–160.
- [116] J. Kemper, Biomass and carbon dioxide capture and storage: a review, *International Journal of Greenhouse Gas Control* 40 (2015) 401–430.
- [117] F.P.R. Marino, The Re-invention of the Tower House for the Construction of Green Buildings NZEB, Integrated With the Vertical Axis Small Wind System, International Congress on Energy Efficiency and Energy Related Materials (ENEFM2013), Springer, 2014.
- [118] D. D'Agostino, L. Mazzarella, What is a Nearly zero energy building? Overview, implementation and comparison of definitions, *Journal of Building Engineering* 21 (2019) 200–212.
- [119] A. Ephraim et al., Biomass Categories, in: *Handbook on Characterization of Biomass, Biowaste and Related By-products*, Springer, 2020, pp. 1–29.
- [120] J. Wang et al., Bioenergy generation and degradation pathway of phenanthrene and anthracene in a constructed wetland-microbial fuel cell with an anode amended with nZVI, *Water research* 150 (2019) 340–348.
- [121] R. García et al., Biomass Pelletization: Contribution to Renewable Power Generation Scenarios, in: *Production of Materials from Sustainable Biomass Resources*, Springer, 2019, pp. 269–294.
- [122] Basu, P., *Biomass gasification, pyrolysis and torrefaction: practical design and theory*. 2018: Academic press.
- [123] M. Uddin et al., An overview of recent developments in biomass pyrolysis technologies, *Energies* 11 (11) (2018) 3115.
- [124] E.J. Soltes, T.J. Elder, Pyrolysis, in: *Organic chemicals from biomass*, CRC Press, 2018, pp. 63–99.
- [125] A. Sharma, V. Pareek, D. Zhang, Biomass pyrolysis—A review of modelling, process parameters and catalytic studies, *Renewable and Sustainable Energy Reviews* 50 (2015) 1081–1096.
- [126] A.V. Bridgwater, Review of fast pyrolysis of biomass and product upgrading, *Biomass and Bioenergy* 38 (2012) 68–94.
- [127] S. You et al., Towards practical application of gasification: a critical review from syngas and biogas perspectives, *Critical Reviews in Environmental Science and Technology* 48 (22–24) (2018) 1165–1213.
- [128] P.C. Munasinghe, S.K. Khanal, Biomass-derived syngas fermentation into biofuels: opportunities and challenges, *Bioresource technology* 101 (13) (2010) 5013–5022.
- [129] D. Castello, T.H. Pedersen, L.A. Rosendahl, Continuous hydrothermal liquefaction of biomass: a critical review, *Energies* 11 (11) (2018) 3165.
- [130] D.C. Elliott et al., Hydrothermal liquefaction of biomass: Developments from batch to continuous process, *Bioresource Technology* 178 (2015) 147–156.
- [131] A. Demirbaş, Mechanisms of liquefaction and pyrolysis reactions of biomass, *Energy conversion and management* 41 (6) (2000) 633–646.
- [132] A. Dimitriadis, S. Bezergianni, Hydrothermal liquefaction of various biomass and waste feedstocks for biocrude production: A state of the art review, *Renewable and Sustainable Energy Reviews* 68 (2017) 113–125.
- [133] C.L. Williams et al., Sources of biomass feedstock variability and the potential impact on biofuels production, *BioEnergy Research* 9 (1) (2016) 1–14.
- [134] L.J.R. Nunes, J.C.O. Matias, J.P.S. Catalão, Biomass combustion systems: A review on the physical and chemical properties of the ashes, *Renewable and Sustainable Energy Reviews* 53 (2016) 235–242.
- [135] M. Fernandez-Lopez et al., Life cycle assessment of swine and dairy manure: pyrolysis and combustion processes, *Bioresource technology* 182 (2015) 184–192.
- [136] Saaty, T., *The Analytic Hierarchy Process: Planning, Priority Setting, Resource Allocation, and (2001). Decision Making with Dependence and Feedback: The Analytic Network Process*. Pittsburgh, PA: RWS Publications, 1990.
- [137] De Baere, L. and B. Mattheeuws. Anaerobic digestion in Europe: state of the art 2010. in Proceedings of the conference ORBIT2010, Heraklion, Greece. 2010.
- [138] R. Bayard et al., Assessment of the effectiveness of an industrial unit of mechanical-biological treatment of municipal solid waste, *Journal of Hazardous Materials* 175 (1–3) (2010) 23–32.
- [139] F. Di Maria et al., Solid anaerobic digestion batch with liquid digestate recirculation and wet anaerobic digestion of organic waste: Comparison of system performances and identification of microbial guilds, *Waste management* 59 (2017) 172–180.
- [140] R. Rajagopal, D.I. Massé, G. Singh, A critical review on inhibition of anaerobic digestion process by excess ammonia, *Bioresource technology* 143 (2013) 632–641.
- [141] A. Mani, Food Preservation by Fermentation and Fermented food products, *International Journal of Academic Research & Development* 1 (2018) 51–57.
- [142] X.M. Guo et al., Hydrogen production from agricultural waste by dark fermentation: a review, *International journal of hydrogen energy* 35 (19) (2010) 10660–10673.
- [143] K. Urbaniec, R.R. Bakker, Biomass residues as raw material for dark hydrogen fermentation—A review, *International Journal of Hydrogen Energy* 40 (9) (2015) 3648–3658.
- [144] R.L. Reaño, Assessment of environmental impact and energy performance of rice husk utilization in various biohydrogen production pathways, *Bioresource technology* 299 (2020) 122590.
- [145] P.C. Hallenbeck, Fermentative hydrogen production: principles, progress, and prognosis, *International Journal of Hydrogen Energy* 34 (17) (2009) 7379–7389.
- [146] K. Trchounian, R.G. Sawers, A. Trchounian, Improving biohydrogen productivity by microbial dark-and photo-fermentations: novel data and future approaches, *Renewable and Sustainable Energy Reviews* 80 (2017) 1201–1216.
- [147] A.J. Marszal et al., On-site or off-site renewable energy supply options? Life cycle cost analysis of a Net Zero Energy Building in Denmark, *Renewable energy* 44 (2012) 154–165.
- [148] R.S. Srinivasan et al., Re (De) fining net zero energy: renewable energy balance in environmental building design, *Building and Environment* 47 (2012) 300–315.
- [149] C. Good, I. Andresen, A.G. Hestnes, Solar energy for net zero energy buildings—A comparison between solar thermal, PV and photovoltaic-thermal (PV/T) systems, *Solar Energy* 122 (2015) 986–996.
- [150] S. Pless P. Torcellini Net-zero energy buildings: A classification system based on renewable energy supply options National Renewable Energy Lab 2010 (NREL), Golden, CO (United States).
- [151] K. Fong, C.K. Lee, Towards net zero energy design for low-rise residential buildings in subtropical Hong Kong, *Applied Energy* 93 (2012) 686–694.
- [152] G. Tsalikis, G. Martinopoulos, Solar energy systems potential for nearly net zero energy residential buildings, *Solar Energy* 115 (2015) 743–756.
- [153] S.A. Kalogirou, Building integration of solar renewable energy systems towards zero or nearly zero energy buildings, *International Journal of Low-Carbon Technologies* 10 (4) (2015) 379–385.
- [154] L.O. Oyedele et al., Reducing waste to landfill in the UK: identifying impediments and critical solutions, *World Journal of Science, Technology and Sustainable Development* (2013).
- [155] A. Athienitis, S. Attia, Design, optimization, and modelling issues of net-zero energy solar buildings, *Proceedings of Eurosun (2010, 2010.)*.
- [156] M. Russell, S. Energy, et al., *Scotland's Energy Future*. (2019).
- [157] B. Ahmed et al., Thermal Pre/Treatment of Organic Fraction of Municipal Solid Waste, in: *Biorefineries: A Step Towards Renewable and Clean Energy*, Springer, 2020, pp. 105–120.
- [158] S. Ascher et al., Township-based bioenergy systems for distributed energy supply and efficient household waste re-utilisation: Techno-economic and environmental feasibility, *Energy* (2019).
- [159] A. Tallini, L. Cedola, A review of the properties of recycled and waste materials for energy refurbishment of existing buildings towards the requirements of NZEB, *Energy Procedia* 148 (2018) 868–875.
- [160] J. Giro-Paloma et al., Use of municipal solid waste incineration bottom ash and crop by-product for producing lightweight aggregate, IOP Conference Series: Materials Science and Engineering, IOP Publishing, 2017.
- [161] Chester, M., D. Stupples, and M. Lees, A comparison of the physical and chemical composition of UK waste streams based on hypothetical compound structure. 2008.
- [162] W. Wu, H.M. Skye, Progress in ground-source heat pumps using natural refrigerants, *International Journal of Refrigeration* 92 (2018) 70–85.
- [163] J. Chen et al., A review of biomass burning: Emissions and impacts on air quality, health and climate in China, *Science of The Total Environment* 579 (2017) 1000–1034.
- [164] S.V. Vassilev, C.G. Vassileva, V.S. Vassilev, Advantages and disadvantages of composition and properties of biomass in comparison with coal: An overview, *Fuel* 158 (2015) 330–350.
- [165] J. Du Shin et al., Biomass Conversion of Plant Residues, in: *Food Bioconversion*, Elsevier, 2017, pp. 351–383.
- [166] F.M. Vieira, P.S. Moura, A.T. de Almeida, Energy storage system for self-consumption of photovoltaic energy in residential zero energy buildings, *Renewable energy* 103 (2017) 308–320.
- [167] J. Jerz, F. Simančík, L. Orovcík, Advanced solution for energy storage in net zero-energy buildings, *Mechanical Technologies and Structural Materials* (2014) 47–54.
- [168] J.P. Da Cunha, P. Eames, Thermal energy storage for low and medium temperature applications using phase change materials—a review, *Applied energy* 177 (2016) 227–238.
- [169] J. Xu, R. Wang, Y. Li, A review of available technologies for seasonal thermal energy storage, *Solar energy* 103 (2014) 610–638.
- [170] V.G. Gude, Energy storage for desalination processes powered by renewable and waste heat sources, *Applied Energy* 137 (2015) 877–898.
- [171] Y. Yang et al., Battery energy storage system size determination in renewable energy systems: A review, *Renewable and Sustainable Energy Reviews* 91 (2018) 109–125.
- [172] Berthold, F., et al., Optimization of a battery charging schedule in a net zero energy house using vehicle-to-home functionality. *Proceedings eSim14, IBPSA*, 2014.

- [173] R. Hemmati, Technical and economic analysis of home energy management system incorporating small-scale wind turbine and battery energy storage system, *Journal of Cleaner Production* 159 (2017) 106–118.
- [174] S. You et al., Comparison of the Co-Gasification of Sewage Sludge and Food Wastes and Cost-Benefit Analysis of Gasification- and Incineration-Based Waste Treatment Schemes, *Bioresource Technology*, 2016.
- [175] A. Bergmann, N. Hanley, The costs and benefits of renewable energy in Scotland, *Studies* (2012) 5.
- [176] L. Poruschi, C.L. Ambrey, J.C. Smart, Revisiting feed-in tariffs in Australia: A review, *Renewable and Sustainable Energy Reviews* 82 (2018) 260–270.
- [177] S.J. Williamson, B.H. Stark, J.D. Booker, Performance of a low-head pico-hydro Turgo turbine, *Applied Energy* 102 (2013) 1114–1126.
- [178] N. Nachman-Hunt, *Small Hydropower Systems: Energy Efficiency and Renewable Energy Clearinghouse*, National Renewable Energy Lab, Golden, CO (US), 2001.
- [179] Ghosh, T.K. and M.A. Prelas, *Energy resources and systems: volume 2: renewable resources*. Vol. 2. 2011: Springer Science & Business Media.
- [180] S. Wächter, Pint-size dams harness streams. *NY Times* (2009) 16.
- [181] J. Laghari et al., A comprehensive overview of new designs in the hydraulic, electrical equipments and controllers of mini hydro power plants making it cost effective technology, *Renewable and sustainable Energy reviews* 20 (2013) 279–293.
- [182] K. Kusakana, J.L. Munda, A. Jimoh, *Economic and Environmental Analysis of Micro Hydropower System for Rural Power Supply*, IEEE, 2008.
- [183] H.O. Njoku, O.V. Ekechukwu, S.O. Onyegebu, Numerical investigation of entropy generation in stratified thermal stores, *Journal of Energy Resources Technology* 140 (1) (2018).
- [184] M. Romero, J. González-Aguilar, *Solar thermal CSP technology*, Wiley Interdisciplinary Reviews: Energy and Environment 3 (1) (2014) 42–59.
- [185] *Solar Energy Opportunities in Rural Locations*. 2010.
- [186] Elswijk, M.J., M.J.M. Jong, and K.J. Strootman, *Photovoltaic/thermal collectors in large solar thermal systems* (2007).
- [187] Ofgem. Tariffs and payments: Domestic RHI. 2018 <https://www.ofgem.gov.uk/environmental-and-social-schemes/domestic-renewable-heat-incentive-domestic-rhi/contacts-guidance-and-resources/tariffs-and-payments-domestic-rhi>, Accessed 29th Jun 2020.
- [188] S.M. Silva et al., Contribution of the solar systems to the nZEB and ZEB design concept in Portugal-Energy, economics and environmental life cycle analysis, *Solar Energy Materials and Solar Cells* 156 (2016) 59–74.
- [189] J.P. Jensen, Evaluating the environmental impacts of recycling wind turbines, *Wind Energy* 22 (2) (2019) 316–326.
- [190] L. Ziegler et al., Lifetime extension of onshore wind turbines: A review covering Germany, Spain, Denmark, and the UK, *Renewable and Sustainable Energy Reviews* 82 (2018) 1261–1271.
- [191] O.S. Ohunakin, O.O. Akinnawonu, Assessment of wind energy potential and the economics of wind power generation in Jos, Plateau State, Nigeria. *Energy for Sustainable Development* 16 (1) (2012) 78–83.
- [192] M. Hydro et al., Feed-in Tariff (FIT), Generation & Export Payment Rate Table. (2017).
- [193] OFGEM. Feed-in Tariff (FIT): Generation and export Payment rate table 1 July 2018 – 31 March 2019. 2018; Available from: <https://www.ofgem.gov.uk/publications-and-updates/feed-tariff-fit-generation-and-export-payment-rate-table-1-july-2018-31-march-2019>.
- [194] Lins C.H., Musolino E., Petrichenko K., Rickerson W., Sawin J.L., Seyboth K., Skeen J., Sovacool B., Sværriison F., Williamson L.E. *Renewables 2014 global status report*. Retrieved from. 2014 Jun 19.
- [195] Y. Xu et al., Global status of recycling waste solar panels: A review, *Waste Management* 75 (2018) 450–458.
- [196] P. Conti, E. Schito, D. Testi, Cost-Benefit analysis of hybrid photovoltaic/thermal collectors in a nearly zero-energy building, *Energies* 12 (8) (2019) 1582.
- [197] E. Pikas et al., Cost-benefit analysis of nZEB energy efficiency strategies with on-site photovoltaic generation, *Energy* 128 (2017) 291–301.
- [198] Y. Chang et al., Energy and environmental implications of using geothermal heat pumps in buildings: An example from north China, *Journal of cleaner production* 167 (2017) 484–492.
- [199] Wemhoener, C., R. Schwarz, and L. Romingera, *Heat Pump Integration and Design for nZEB*. 2017.
- [200] H. Li et al., Application analyze of a ground source heat pump system in a nearly zero energy building in China, *Energy* 125 (2017) 140–151.
- [201] S. Deng, R. Wang, Y. Dai, How to evaluate performance of net zero energy building—A literature research, *Energy* 71 (2014) 1–16.
- [202] G. Litjens, E. Worrell, W. Van Sark, Lowering greenhouse gas emissions in the built environment by combining ground source heat pumps, photovoltaics and battery storage, *Energy and Buildings* 180 (2018) 51–71.
- [203] I. Staffell et al., A review of domestic heat pumps, *Energy & Environmental Science* 5 (11) (2012) 9291–9306.
- [204] S. You et al., Techno-economic and greenhouse gas savings assessment of decentralized biomass gasification for electrifying the rural areas of Indonesia, *Applied Energy* 208 (2017) 495–510.
- [205] L. Yassin et al., Techno-economic performance of energy-from-waste fluidized bed combustion and gasification processes in the UK context, *Chemical Engineering Journal* 146 (3) (2009) 315–327.
- [206] S. McLanaghan, *Delivering the landfill directive: the role of new and emerging technologies*, Report for the Strategy Unit 8 (2002) 2002.
- [207] M. Bolhär-Nordenkamp, J. Isaksson, Refuse derived fuel gasification technologies for high efficient energy production, *Waste Management: Waste to Energy* 4 (2014) 379–388.
- [208] Hammerschmid, D.-I.A. and D.-I.M. Forstinger. "IEA Bioenergy Task 32 project Techno-economic evaluation of selected decentralised CHP applications based on biomass combustion with steam turbine and ORC processes." (2015).
- [209] R. Renda et al., Economic feasibility study of a small-scale biogas plant using a two-stage process and a fixed bio-film reactor for a cost-efficient production, *Energy Procedia* 95 (2016) 385–392.
- [210] A. Wrobel-Tobiszewska et al., An economic analysis of biochar production using residues from Eucalypt plantations, *Biomass and Bioenergy* 81 (2015) 177–182.
- [211] J. Las-Heras-Casas et al., Implementation of biomass boilers for heating and domestic hot water in multi-family buildings in Spain: Energy, environmental, and economic assessment, *Journal of Cleaner Production* 176 (2018) 590–603.
- [212] M. Dowds, S. You, Economic analysis of the routes for fulfilment of net-zero energy buildings (NZEBS) in the UK, *Energy Procedia* 158 (2019) 3541–3546.
- [213] C. Kristöfel et al., The wood pellet market in Austria: A structural market model analysis, *Energy policy* 88 (2016) 402–412.
- [214] A. Porcu et al., Techno-Economic Analysis of a Small-Scale Biomass-to-Energy BFB Gasification-Based System, *Energies* 12 (3) (2019) 494.
- [215] Marszał, A.J. "Life cycle cost optimization of a BOLIG+ Zero Energy Building." (2012).
- [216] D. Qerimi et al., Modeling of the solar thermal energy use in urban areas, *Civil Engineering Journal* 6 (7) (2020) 1349–1367.
- [217] W. Wu, H.M. Skye, P.A. Domanski, Selecting HVAC systems to achieve comfortable and cost-effective residential net-zero energy buildings, *Applied energy* 212 (2018) 577–591.
- [218] C. Power, A. McNabola, P. Coughlan, Development of an evaluation method for hydropower energy recovery in wastewater treatment plants: Case studies in Ireland and the UK, *Sustainable Energy Technologies and Assessments* 7 (2014) 166–177.
- [219] S. Chen et al., Life cycle assessment and economic analysis of biomass energy technology in China: A brief review, *Processes* 8 (9) (2020) 1112.
- [220] B. Chang, K. Starcher, Evaluation of wind and solar energy investments in Texas, *Renewable Energy* 132 (2019) 1348–1359.
- [221] Y. Zhu et al., Geothermal power production from abandoned oil reservoirs using in situ combustion technology, *Energies* 12 (23) (2019) 4476.
- [222] I. Fernández García, A. Mc Nabola, Maximizing hydropower generation in gravity water distribution networks: Determining the optimal location and number of pumps as turbines, *Journal of Water Resources Planning and Management* 146 (1) (2020) 04019066.
- [223] Standardization, I.O.f., *Environmental Management: Life Cycle Assessment: Principles and Framework*. 2006: ISO.
- [224] Simonen, K., *Life cycle assessment*. 2014: Routledge.
- [225] Sims, R.E., et al., *Energy supply climate change 2007: Mitigation. Contribution of working group III to the fourth assessment report of the intergovernmental panel on climate change*. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 2007.
- [226] Elsayed, M., R. Matthews, and N. Mortimer, Carbon and energy balances for a range of biofuels options. 2003: AEA Technology.
- [227] S. Kang, B. Sim, J. Kim, Volume and Mass Measurement of a Burning Wood Pellet by Image Processing, *Energies* 10 (2017) 603.
- [228] Li, Y., *Life cycle assessment of net zero energy poultry housing*. 2020, University of British Columbia.
- [229] M. Weißenberger, W. Jensch, W. Lang, The convergence of life cycle assessment and nearly zero-energy buildings: The case of Germany, *Energy and buildings* 76 (2014) 551–557.
- [230] M. Cellura et al., Energy life-cycle approach in Net zero energy buildings balance: Operation and embodied energy of an Italian case study, *Energy and Buildings* 72 (2014) 371–381.
- [231] E. Hoxha, T. Jusselme, On the necessity of improving the environmental impacts of furniture and appliances in net-zero energy buildings, *Science of The Total Environment* 596 (2017) 405–416.
- [232] M. Paleari, M. Lavagna, A. Campioli, The assessment of the relevance of building components and life phases for the environmental profile of nearly zero-energy buildings: life cycle assessment of a multifamily building in Italy, *The International Journal of Life Cycle Assessment* 21 (12) (2016) 1667–1690.
- [233] C.L. Thiel et al., A materials life cycle assessment of a net-zero energy building, *Energies* 6 (2) (2013) 1125–1141.
- [234] M. Hu, Building impact assessment—A combined life cycle assessment and multi-criteria decision analysis framework, *Resources, Conservation and Recycling* 150 (2019) 104410.
- [235] S. Attia et al., Overview and future challenges of nearly zero energy buildings (nZEB) design in Southern Europe, *Energy and Buildings* 155 (2017) 439–458.
- [236] D'Agostino, D., P. Zangheril, and D. Paci. *Final Report Transition towards NZEBs in Cyprus*. European Commission: Ispra, Italy. (2017).
- [237] H. Erhorn, H. Erhorn-Kluttig, Selected examples of nearly zero-energy buildings, Report of the Concerted Action EPBD (2014).
- [238] P. Pallis et al., Towards NZEB in Greece: A comparative study between cost optimality and energy efficiency for newly constructed residential buildings, *Energy and Buildings* 198 (2019) 115–137.

- [239] Sousa, J.R., S.M. Silva, and M.G.d. Almeida, Energy rehabilitation of Portuguese residential building stock through its transformation into NZEB, 2012.
- [240] P. Zangheri et al., Identification of cost-optimal and NZEB refurbishment levels for representative climates and building typologies across Europe, *Energy Efficiency* 11 (2) (2018) 337–369.
- [241] M. Ferreira, M. Almeida, A. Rodrigues, Cost-optimal energy efficiency levels are the first step in achieving cost effective renovation in residential buildings with a nearly-zero energy target, *Energy and Buildings* 133 (2016) 724–737.
- [242] A. Manea et al., Changes in the type of precipitation and associated cloud types in Eastern Romania (1961–2008), *Atmospheric Research* 169 (2016) 357–365.
- [243] Bürger, V., Overview and assessment of new and innovative integrated policy sets that aim at the NZEB standard. Report in the frame of the IEE project eentranze, 2013
- [244] J. de la Hoz et al., Evaluating the approach to reduce the overrun cost of grid connected PV systems for the Spanish electricity sector: Performance analysis of the period 2010–2012, *Applied energy* 121 (2014) 159–173.
- [245] Attia, S. and A. De Herde. Early design simulation tools for net zero energy buildings: a comparison of ten tools. in Conference Proceedings of 12th International Building Performance Simulation Association, 2011. 2011.
- [246] A.J. Marszal, P. Heiselberg, Life cycle cost analysis of a multi-storey residential net zero energy building in Denmark, *Energy* 36 (9) (2011) 5600–5609.
- [247] Karlsson, A., et al., Common barriers and challenges in current nZEB practice in Europe. D1. 1 Report, FP7 ZenN, 2013.
- [248] I. Andrić, M. Koc, S.G. Al-Ghamdi, A review of climate change implications for built environment: Impacts, mitigation measures and associated challenges in developed and developing countries, *Journal of Cleaner Production* 211 (2019) 83–102.
- [249] N.Y. Amponsah et al., Greenhouse gas emissions from renewable energy sources: A review of lifecycle considerations, *Renewable and Sustainable Energy Reviews* 39 (2014) 461–475.